




AGAT CLEAN SLIGHT LED

Clean luminaires - recessed

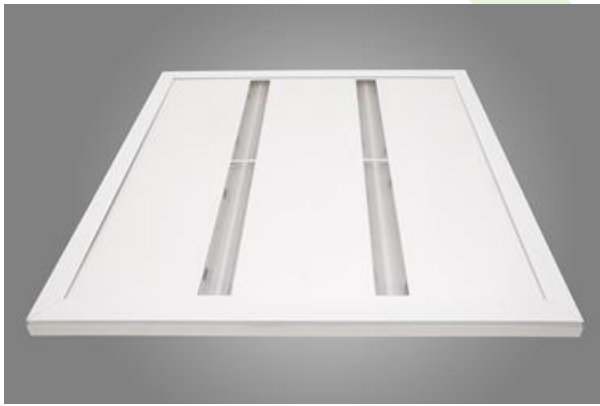

Luminaire designed to module suspended ceilings. Light distribution made by using high performance lenses. Luminaire body made from steel sheet, powder coated in white. Luminaire recommended for: emergency departments, intensive care units, and treatment rooms.




Cosmetics laboratory Dr Irena Eris, Piaseczno



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
AGAT CLEAN SLIGHT LED 2600	2617	14,4	4000	595 x 595 x 35
AGAT CLEAN SLIGHT LED 3900	3926	21,7	4000	595 x 595 x 35
AGAT CLEAN SLIGHT LED 4400	4565	24,7	4000	595 x 595 x 35
AGAT CLEAN SLIGHT LED 5200	5234	28,2	4000	595 x 595 x 35
AGAT CLEAN SLIGHT LED 6600	6848	35,3	4000	595 x 595 x 35
AGAT CLEAN SLIGHT LED 8800	9130	49,1	4000	595 x 595 x 35

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

Mechanical features:

Assembly	mounted in module ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	SH (transparent hardened glass)

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022