





KUBIK CEILING ECO LED

Outdoor luminaires

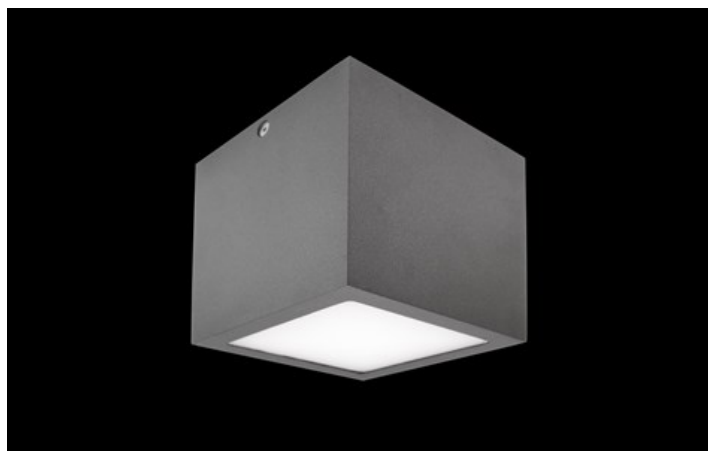

Architectural luminaire designed for ceiling mounting. The body is made of aluminum. Interchangeable light sources with the popular GU10 socket. The ergonomic shapes of the luminaire allow the use of KUBIK in almost every building. Very easy assembly. Luminaire with IP54 protection rating.

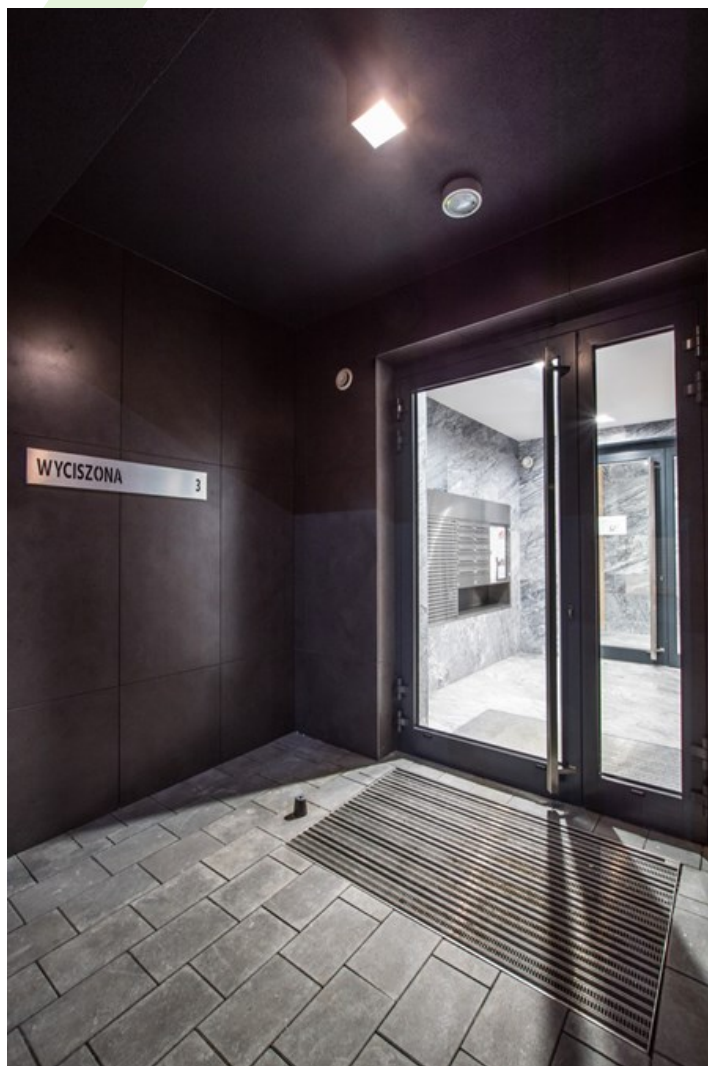


Nova Królikarnia, Warsaw



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK CEILING ECO LED 1X GU10	depending on applied light source	depending on applied light source	depending on applied light source	120 x 120 x 120
KUBIK CEILING ECO LED 2X GU10	depending on applied light source	depending on applied light source	depending on applied light source	200 x 120 x 120

Technical drawing:



Light and electrical features:

Light source	RETROFIT GU10 (not included)
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	depending on applied light source
Lx/By	depending on applied light source
CRI	depending on applied light source
SDCM (LED sources)	depending on applied light source
Operating temperature range [°C]	
Driver	none

* Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on ceiling
Material	aluminum
Color	RAL 9005 (black) RAL 9016 (white) RAL 7016 (anthracite, metallic, fine structure) *
Diffuser	PC (opallescent polycarbonate)

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022