

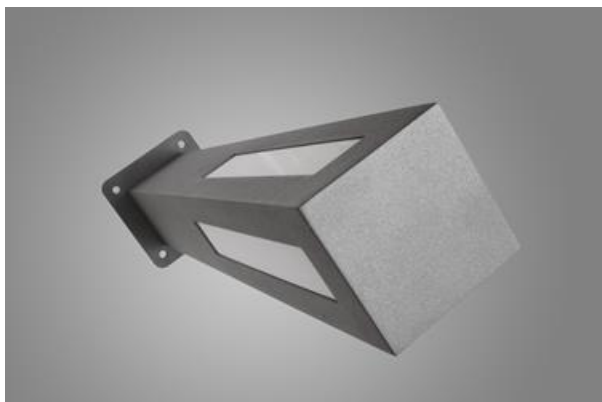


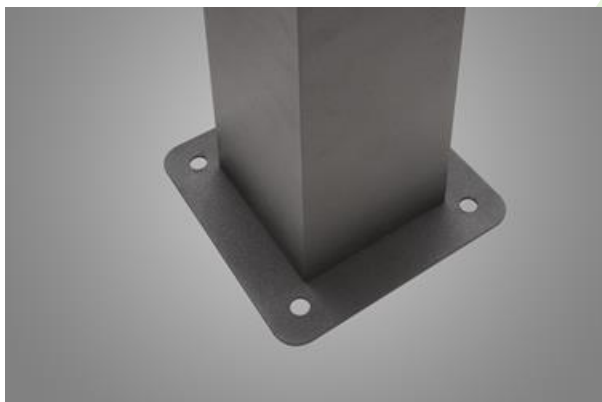


KUBIK POLE SOFT 100 LED

Outdoor luminaires

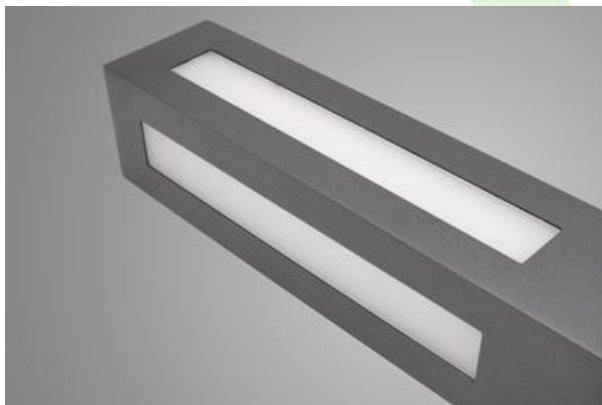

Outer luminaire to be mounted on a solid surface (concrete, sett, or substructure) equipped with highly efficient energy saving LED sources of the newest generation. Luminaire dedicated to illuminate pedestrians routes such as park alleys, parking site passages, property entrances. Its body made from aluminum (profile size 100x100mm) which is coated by the facade powder used for outdoor activities. PLX opal diffuser

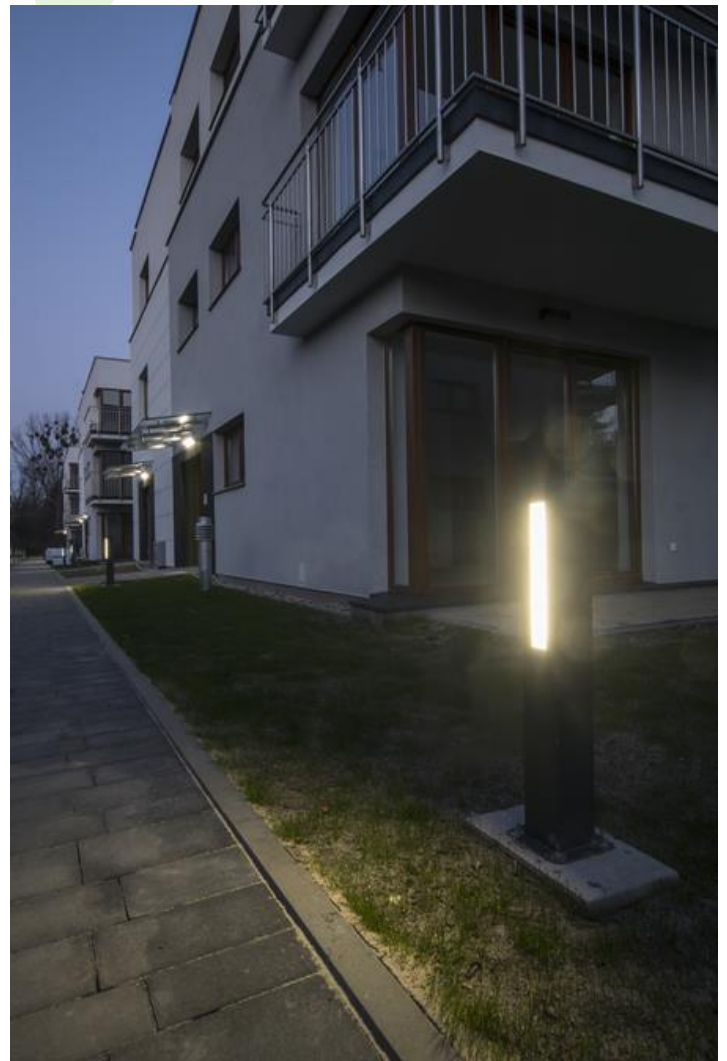


Block of flats Sklepowa 22 street, Warsaw



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|---------------------------------|------------------------|------------------------|-----------|---------------------------|
| KUBIK POLE SOFT 100 LED 3S 3300 | 3309 | 21 | 4000 | 160 x 160 x 750 |
| KUBIK POLE SOFT 100 LED 4S 4400 | 4565 | 24,7 | 4000 | 160 x 160 x 750 |

Technical drawing:



Light and electrical features:

| | |
|----------------------------------|-----------------------|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 60000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Operating temperature range [°C] | -25 ÷ 30 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |

Mechanical features:

| | |
|----------|--|
| Assembly | for the ground |
| Material | aluminum |
| Color | RAL 9007 (dark gray, metallic, fine structure) |
| Diffuser | PMMA opal |

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022