




KUBIK WALL ECO LED IP54

Outdoor luminaires







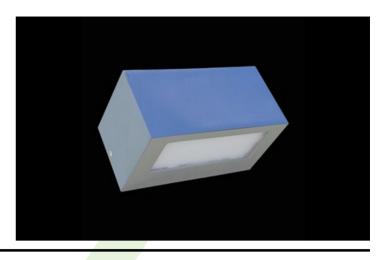

Luminaire for removable LED sources, called Retofit, matching the G9 holder. The body is made of aluminum painted with a special facade paint resistant to weather conditions. PMMA opal. Very easy assembly and access to the interior. Recommended for balconies lighting.



"Awangarda" residential, Warsaw











Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK WALL ECO LED UP OR	depending on applied	depending on applied	depending on applied light source	100 x 100 x 110 / 200 x
DOWN IP54 G9	light source	light source		100 x 110
KUBIK WALL ECO LED UP&DOWN IP54 G9	depending on applied	depending on applied	depending on applied	100 x 100 x 110 / 200 x
	light source	light source	light source	100 x 110
KUBIK WALL ECO LED UP OR	depending on applied	depending on applied	depending on applied light source	120 x 120 x 120 / 200 x
DOWN IP54 GU10	light source	light source		120 x 100

Technical drawing:



Light and electrical features:

Light source	RETROFIT G9 (not included)/RETROFIT GU10 (not included)
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	depending on applied light source
Lx/By	depending on applied light source
CRI	depending on applied light source
SDCM (LED sources)	depending on applied light source
Operating temperature range [°C]	
Driver	none

^{*} Variant to specify when ordering

Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure) RAL 9005 (black) RAL 9016 (white) *
Diffuser	PMMA opal

Additional information:

LED light source maximum diameter (only for G9 sources): 18 mm. PIR - luminaire with motion sensor.