




## SNAKE V LED

### Architectural luminaires

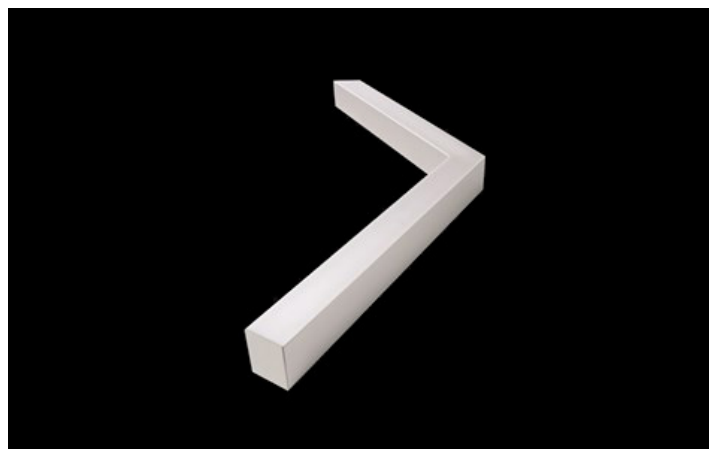

Luminary equipped with the highly efficient LED source. Body made from aluminum profile. Optical system provides regular light distribution on diffuser. There are two kinds of diffusers available: opal and PMMA micro-prism. Luminary adapted to be mounted on suspensions or directly on a solid ceiling construction. The suspended version is equipped with the suspension system which is 1500 mm long, and has the smooth regulation of the suspension length. These lumi - naries may be dedicated to decorate the representative places such as: entrances, receptions, restaurants, halls, etc.




Domena.pl offices, Bydgoszcz



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
SNAKE V LED 2600	2525 / 2617	14,4	3000 / 4000	590/590 x 63 x 74
SNAKE V LED 4400	4406 / 4565	24,7	3000 / 4000	590/590 x 63 x 74
SNAKE V LED 5200	5051 / 5234	28,2	3000 / 4000	1150/1150 x 63 x 74
SNAKE V LED 8800	8811 / 9130	49,1	3000 / 4000	1150/1150 x 63 x 74

## Technical drawing:



## Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000 (1) / 147000 (2)
<b>Lx/By</b>	L80/B10 (1) / L70/B50 (2)
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Operating temperature range [°C]</b>	5 ÷ 30
<b>Driver</b>	standard on/off (E)
<b>Power factor cos φ</b>	>0,95

## Mechanical features:

<b>Assembly</b>	directly mounted to ceiling construction or surface mounted on slings
<b>Material</b>	aluminum
<b>Color</b>	anodised aluminum
<b>Diffuser</b>	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 23-12-2022