




# **RUBIN CLEAN LED CRI95**

#### **Clean luminaires CRI95**

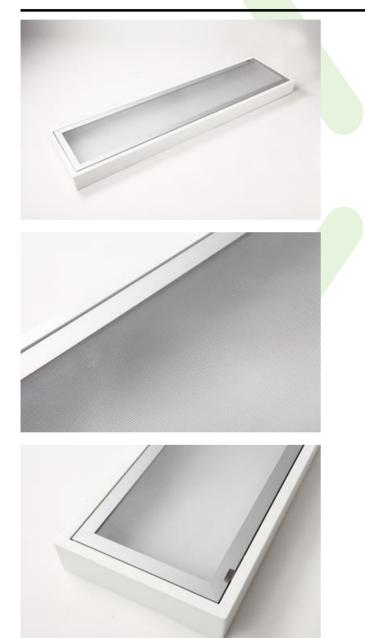

Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaries (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering "deep red" color, and R13 responsible for rendering "light orange" color). Surface mounted luminary equipped in highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers and optical systems in aluminum frame.



Dialysis station, hospital in Łomża

R


ΙK.

 $( E) \bigoplus_{\text{LED}} (E) \bigoplus_{\text{LED}} (P_{65})$ 

# Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN CLEAN LED CRI95 3600	3917	27,8	4000	610 x 310 x 78
RUBIN CLEAN LED CRI95 5400	5875	39,2	4000	620 x 620 x 78
RUBIN CLEAN LED CRI95 7200	7833	51,8	4000	1210 x 310 x 78 / 620 x 620 x 78
RUBIN CLEAN LED CRI95 9000	9791	63,6	4000	620 x 620 x 78
RUBIN CLEAN LED CRI95 10800	11750	73,5	4000	1220 x 620 x 78
RUBIN CLEAN LED CRI95 14400	15666	102,5	4000	1220 x 620 x 78

### **Technical drawing:**



# Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>95
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

\* Variant to specify when ordering

# **Mechanical features:**

Assembly	surface mounted on ceiling
Material	steel sheet
Color	white RAL 9016 (white) *
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) PLX (PMMA opal) SHM (hardened mat glass)