



RUBIN LOOK LED

Surface mounted luminaires



Surface mounted luminary for LED sources. Luminary body made from steel sheet, powder coated. Luminary recommended for: wards and hospital bathrooms.




"Czarno na białym" hotel, Cracow



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN LOOK LED 1950	1964	11,1	4000	417 x 417 x 55
RUBIN LOOK LED 2600	2525 / 2617	14,4	3000 / 4000	417 x 417 x 55 / 595 x 320 x 55
RUBIN LOOK LED 3300	3316 / 3436	19,2	3000 / 4000	417 x 417 x 55
RUBIN LOOK LED 3900	3788 / 3926	21,7	3000 / 4000	595 x 595 x 55
RUBIN LOOK LED 4400	4406 / 4565	24,7	3000 / 4000	595 x 320 x 55
RUBIN LOOK LED 5200	5051 / 5234	28,2	3000 / 4000	595 x 595 x 55 / 1205 x 302 x 55
RUBIN LOOK LED 6600	6848	35,3	4000	595 x 595 x 55
RUBIN LOOK LED 8800	9130	49,1	4000	1205 x 302 x 55 / 595 x 595 x 55

Technical drawing:

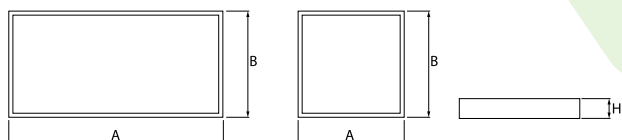

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

Mechanical features:

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022

Dodatkowe informacje / Additional information / Zusätzliche Informationen:

Diody LED Standard vs LED Smooth / Standard LED vs Smooth LED modules / Standard LED vs Smooth LED Module



STANDARD



SMOOTH

UWAGA / NOTE / ACHTUNG

W oprawkach typu SMOOTH* z przesłoną półprzezroczystą tj. MICRO-PRM + SH; MICRO-PRM, SHM pojawia się "efekt cienia" widoczny na zdjęciu.
*dotyczy tylko wymiarów 1200x300 i 1200x600 (+/- 5 cm)

In SMOOTH * luminaires with a semi-transparent diffuser MICRO-PRM + SH; MICRO-PRM, SHM appears "shadow effect" visible in the picture below.
* only for dimensions 1200x300 and 1200x600 (+/- 5 cm)

In SMOOTH * -Leuchten mit einem halbtransparenten Diffusor MICRO-PRM + SH; MICRO-PRM, SHM erscheint als „Schatteneffekt“ im Bild unten sichtbar.
* nur für Abmessungen 1200x300 und 1200x600 (+/- 5 cm)

