



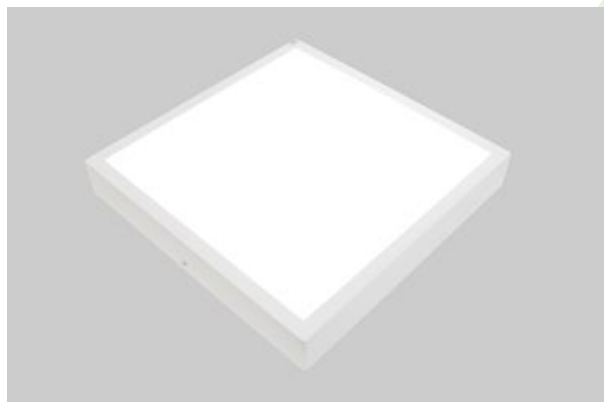

RUBIN LOOK LED SMOOTH COMPACT

Compact

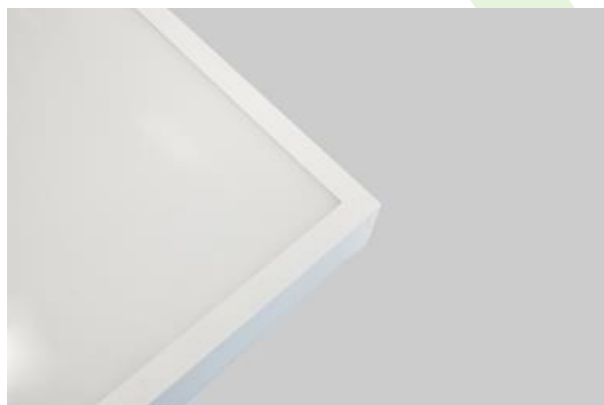

Surface mounted luminary for LED sources. Luminary body made from steel sheet, powder coated. Luminary recommended for: wards and hospital bathrooms.




"Grójecka 216" apartments, Warsaw



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|------------------------------------|------------------------|------------------------|-------------|---------------------------|
| RUBIN LOOK LED SMOOTH COMPACT 2500 | 2245 / 2377 | 14,2 | 3000 / 4000 | 365 x 365 x 50 |
| RUBIN LOOK LED SMOOTH COMPACT 3000 | 3193 / 3381 | 20,1 | 3000 / 4000 | 365 x 365 x 50 |
| RUBIN LOOK LED SMOOTH COMPACT 4000 | 4433 / 4695 | 28,9 | 3000 / 4000 | 365 x 365 x 50 |

Technical drawing:



Light and electrical features:

| | |
|--|---------------------------|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 (1) / 80000 (2) |
| Lx/By | L70/B10 (1) / L80/B10 (2) |
| CRI | >80 |
| SDCM (LED sources) | 5 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|-----------------|---|
| Assembly | surface mounted on ceiling |
| Material | steel sheet |
| Color | RAL 9006 (gray, metallic, fine structure) RAL 9016 (white) * |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal) |

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022