



TOPAZ ODG CLEAN AL LED

Clean luminaires - recessed




Body of the luminaire made of steel sheet powder coated in white. Special construction of the luminaire allows opening it from the top. Thanks to this, maintenance can be done without littering facilities. Product is equipped in highly efficient LED light source. The luminaire recommended for pharmaceutical, electrical and chemical industry.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
TOPAZ ODG CLEAN AL LED 6600	6608 / 6848	35,3	3000 / 4000	657 x 626 x 50-105
TOPAZ ODG CLEAN AL LED 8800	8811 / 9130	49,1	3000 / 4000	657 x 626 x 50-105

Technical drawing:

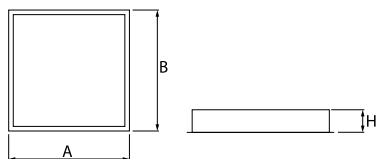

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	for specialty or concrete ceilings
Material	steel sheet
Color	RAL 9010 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) PLX (PMMA opal) SHM (hardened mat glass)

Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022