




X-WALL K9 LED

Surface mounted luminaires



Surface mounted and wall luminaire. Luminaire body made from aluminum profile, its diffuser made from PMMA. Its asymmetric optical system together with the diffuser provides high energetic efficiency. Luminaire recommended for: hospital bathrooms and wards.

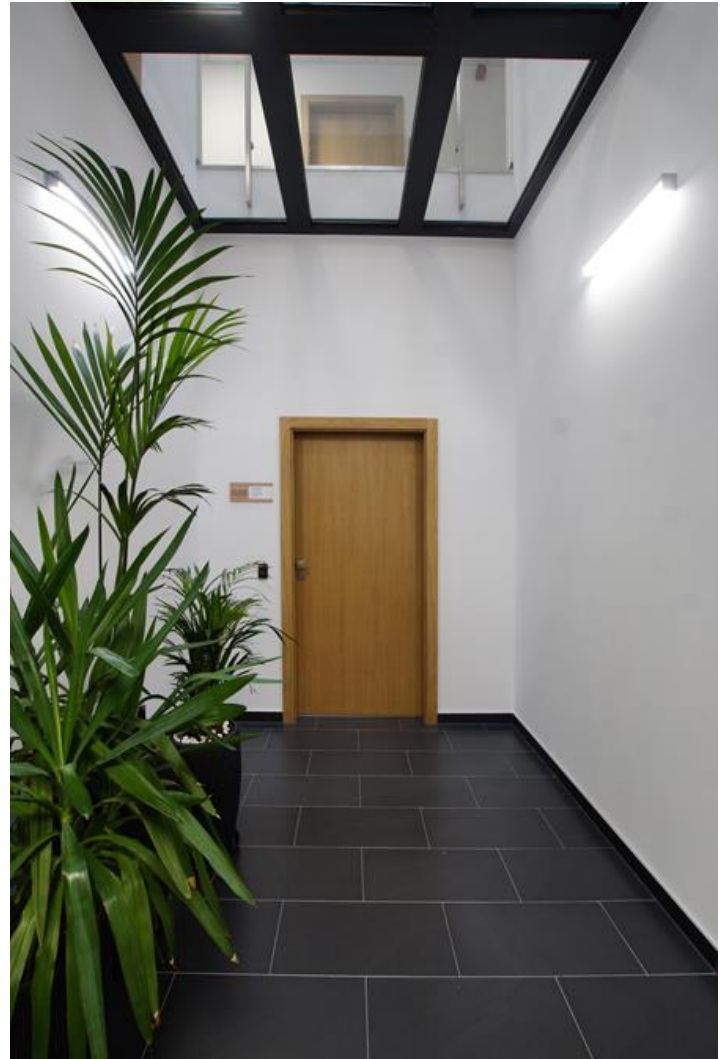



National Research Institute, Warsaw



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-WALL K9 LED 1300	1349 / 1420	9	3000 / 4000	574 x 50 x 60
X-WALL K9 LED 1950	1895 / 1964	11,1	3000 / 4000	855 x 50 x 60
X-WALL K9 LED 2200	2203 / 2283	12,6	3000 / 4000	574 x 50 x 60
X-WALL K9 LED 2600	2525 / 2617	14,4	3000 / 4000	1134 x 50 x 60
X-WALL K9 LED 3250	3158 / 3273	18,3	3000 / 4000	1415 x 50 x 60
X-WALL K9 LED 3900	3788 / 3926	21,7	3000 / 4000	1694 x 50 x 60
X-WALL K9 LED 4400	4406 / 4565	24,7	3000 / 4000	1134 x 50 x 60
X-WALL K9 LED 5200	5051 / 5234	28,2	3000 / 4000	2255 x 50 x 60
X-WALL K9 LED 5500	5526 / 5727	30,5	3000 / 4000	1415 x 50 x 60
X-WALL K9 LED 6500	6314 / 6543	34,8	3000 / 4000	2821 x 50 x 60
X-WALL K9 LED 6600	6608 / 6848	35,3	3000 / 4000	1694 x 50 x 60
X-WALL K9 LED 8800	8811 / 9130	49,1	3000 / 4000	2255 x 50 x 60

Technical drawing:

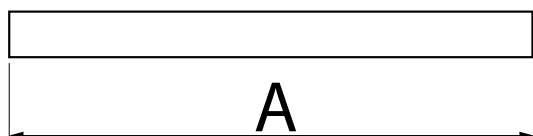

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,9 >0,95 *

* Variant to specify when ordering

Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	anodised aluminum
Diffuser	PLX (PMMA opal)

Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022