



### X-LINE LED CONNECTOR T

#### **Surface mounted luminaires**









Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Manor house from the 17th century, Łodygowice




















### Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE LED 3900	3788 / 3926	21,7	3000 / 4000	1126 x 593 x 71
X-LINE LED 6600	6608 / 6848	35,3	3000 / 4000	1126 x 593 x 71

## **Technical drawing:**



### Light and electrical features:

Light source	LED			
Voltage	220240 V, 5060 Hz			
Lifetime of LED sources [h]	100000 (1) / 147000 (2)			
Lx/By	L80/B10 (1) / L70/B50 (2)			
CRI	>80			
SDCM (LED sources)	3			
Operating temperature range [°C]	5 ÷ 30			
Driver	standard on/off (E) DIM DALI (EDD) *			
Power factor cos φ	>0,95			

<sup>\*</sup> Variant to specify when ordering

### **Mechanical features:**


Assembly	directly mounted to ceiling construction or surface mounted on slings
Material	aluminum
Color	anodised aluminum
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

### **Additional information:**

The luminaire can be made in CLO version.



# <u>Dodatkowe informacje / Additional information:</u>

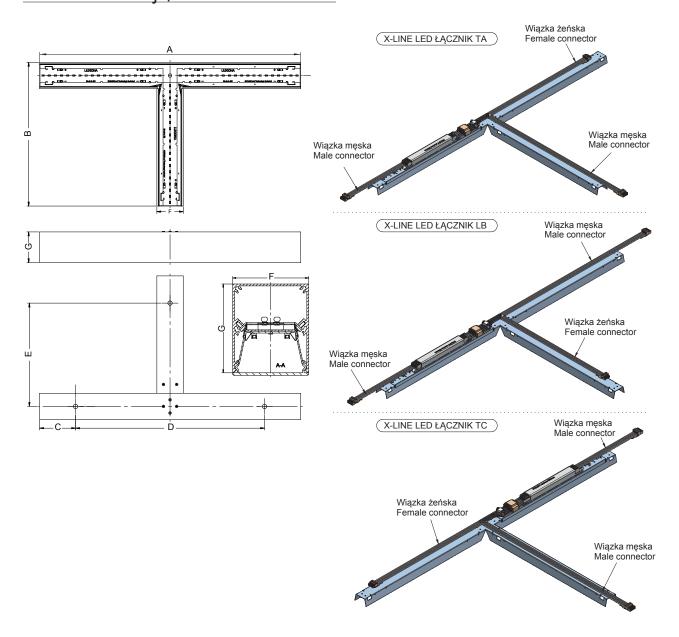

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	
X-LINE LED ŁACZNIK TA / X-LINE LED CONNECTOR TA								
3900	1126	593	80	966	483	60	72	
6600	1126	593	80	966	483	60	72	
<u>X-LINE LED ŁĄC</u> 3900 6600	ZNIK TB 1126 1126	X-LINE 593 593	LED CON 80 80	NECTOR 966 966	R TB 483 483	60 60	72 72	
X-LINE LED ŁACZNIK TC / X-LINE LED CONNECTOR TC								
3900	1126	593	80	966	483	60	72	
6600	1126	593	80	966	483	60	72	

