



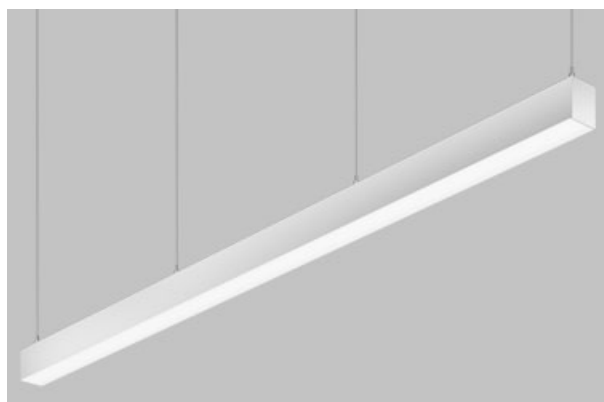

X-LINE PRO COMPACT LINE

Compact

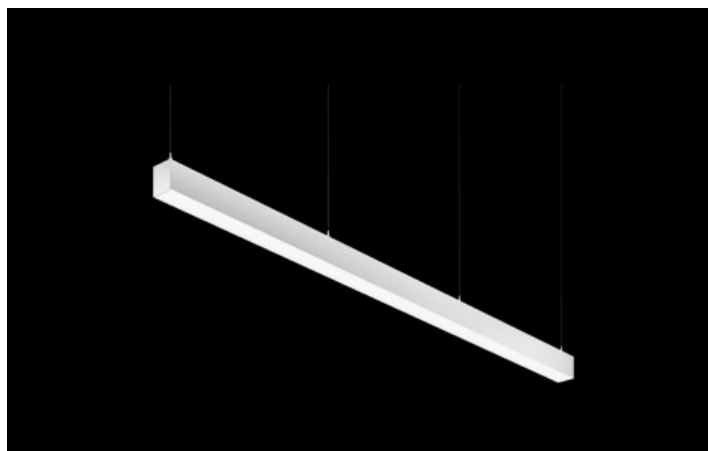


Light fitting made out of aluminium profile. Simple luminaire construction (no mounting plates or LED plates). LEDs in the standard version are mounted by inserting them into the slot in the middle of the profile. Direct (down) light distribution. Available optical systems: PMMA opal diffuser (PLX), microprismatic PMMA (Micro-PRM). The luminaire is available in a line version. Available colors: anodized aluminum or any color from the RAL palette on request. Gray polycarbonate end caps, white or black on request. Plastic plate (HIPS) masking the electronics compartment (only in luminaires with direct distribution). Possibility to use an aluminum snap-on aluminum cover and increase the IP rating to IP40. The use of luminaires typically for offices, public utility rooms, communication / common areas in multi-family buildings.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE PRO COMPACT 2000	2303,2	13,3	4000	568 x 60 x 72
X-LINE PRO COMPACT 3000	3454,8	19,9	4000	848 x 60 x 72
X-LINE PRO COMPACT 4000	4606,4	26,5	4000	1128 x 60 x 72
X-LINE PRO COMPACT 6000	6909,6	39,8	4000	1690 x 60 x 72
X-LINE PRO COMPACT 8000	9212,8	53,1	4000	2250 x 60 x 72

Technical drawing:

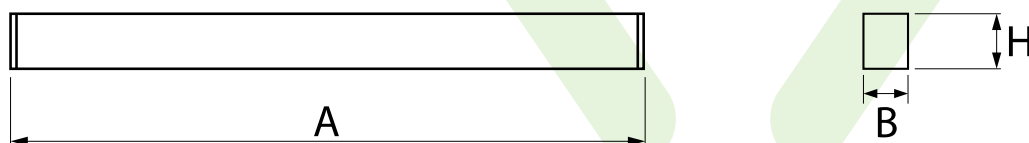

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 35
Driver	standard on/off (E) DIM DALI (EDD) standard (E) *


* Variant to specify when ordering

Mechanical features:

Assembly	directly mounted to ceiling construction or surface mounted on slings
Material	aluminum
Color	anodised aluminum
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022

Additional information:

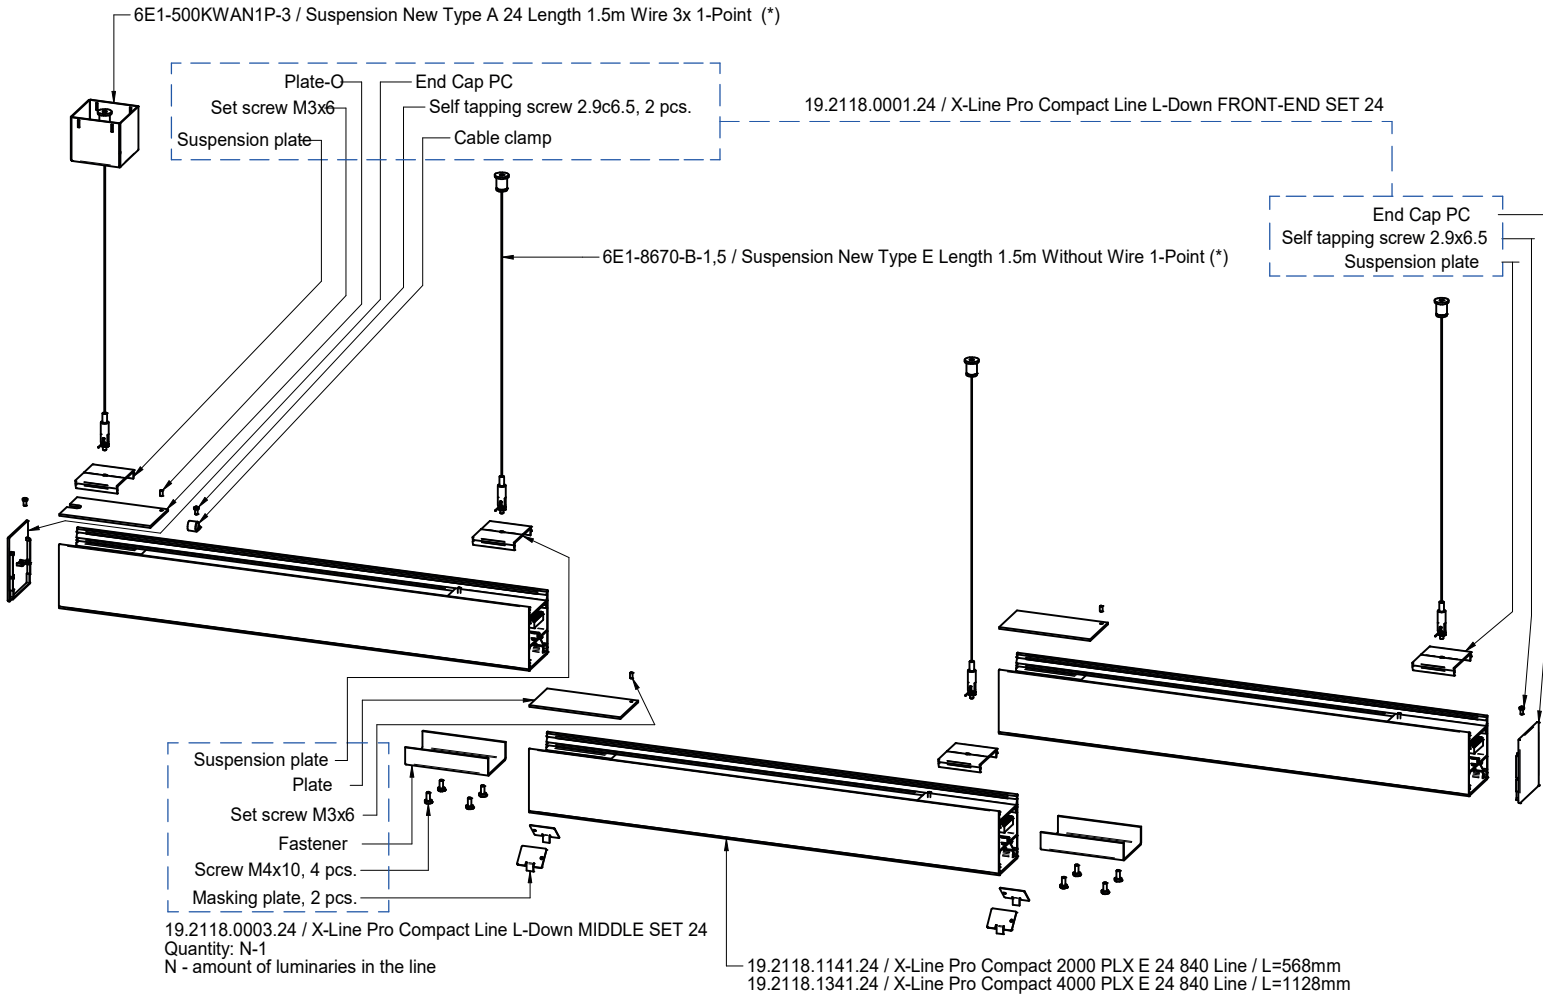


Two possible configuration of 10m lines:

- 1) 19.2118.1141.24 x18, 19.2118.0001.24, 19.2118.0003.24 x17, 6E1-500KWANP-3, 6E1-8670-B-1,5 x17, total line length 10248m.
- 2) 19.2118.1341.24 x9, 19.2118.0001.24, 19.2118.0003.24 x8, 6E1-500KWANP-3, 6E1-8670-B-1,5 x8, total line length 10156mm.

(*) For other suspensions, check www.luxiona.pl/Products/accessories/suspension

Standard materials and their colours

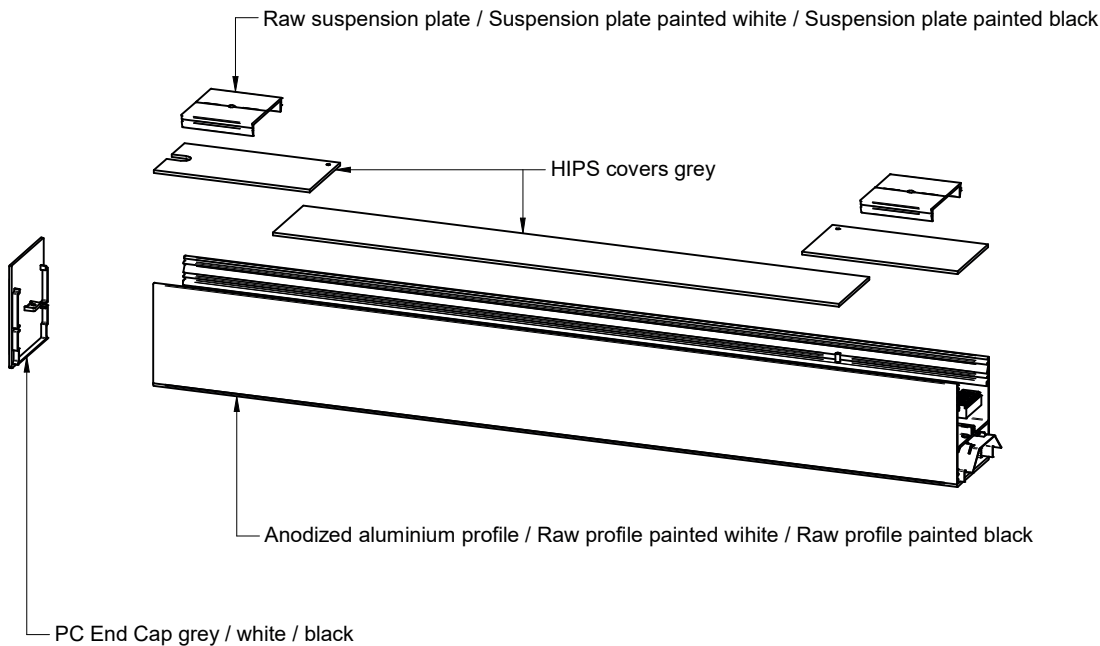

HIPS - High Impact Polystyrene
PC - Polycarbonate