



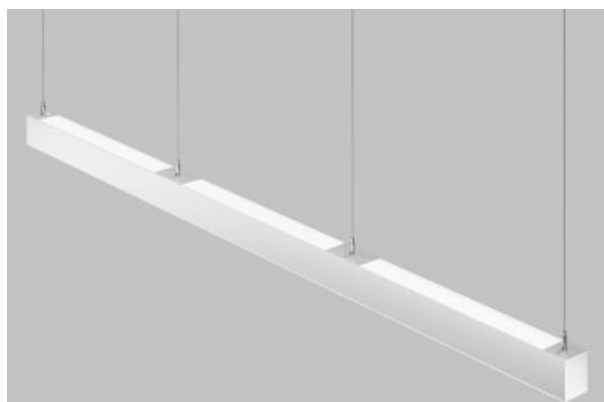

X-LINE PRO COMPACT UP&DOWN LINE

Compact

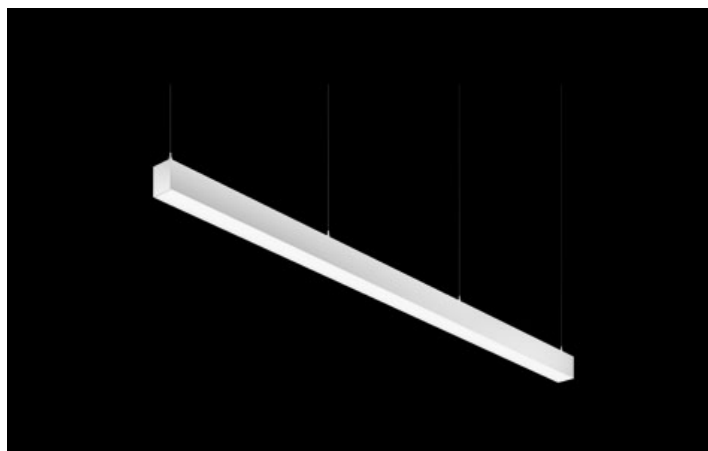



Light fitting made out of aluminium profile. Simple luminaire construction (no mounting plates or LED plates). LEDs in the standard version are mounted by inserting them into the slot in the middle of the profile. Direct-indirect (up&down) light distribution. Available optical systems: PMMA opal diffuser (PLX), microprismatic PMMA (Micro-PRM). Diffuser used for indirect light distribution (at the top of the luminaire) available only in the PLX-T version (transparent PMMA). The luminaire is available in a line version. Available colors: anodized aluminum or any color from the RAL palette on request. Gray polycarbonate end caps, white or black on request. Plastic plate (HIPS) masking the electronics compartment (only in luminaires with direct distribution). Possibility to use an aluminum snap-on aluminum cover and increase the IP rating to IP40. The use of luminaires typically for offices, public utility rooms, communication / common areas in multi-family buildings.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE PRO COMPACT 1000/2000	3517	19,8	4000	568 x 60 x 72
X-LINE PRO COMPACT 1500/3000	5275	29,7	4000	848 x 60 x 72
X-LINE PRO COMPACT 2000/4000	7034	39,6	4000	1128 x 60 x 72
X-LINE PRO COMPACT 3000/6000	10550	59,6	4000	1690 x 60 x 72
X-LINE PRO COMPACT 4000/8000	7034 / 14068	39,6 / 79,3	4000	2250 x 60 x 72

Technical drawing:

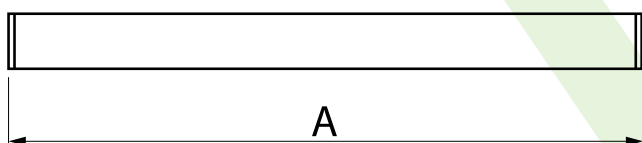

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 35
Driver	standard (E) DIM DALI (EDD) *


* Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	anodised aluminum
Diffuser	PLX-T/Micro-PRM (transparent PMMA/micro-prismatic diffuser PMMA) [up/down] PLX-T/PLX (transparent PMMA/PMMA opal) [up/down]

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022

Additional information:

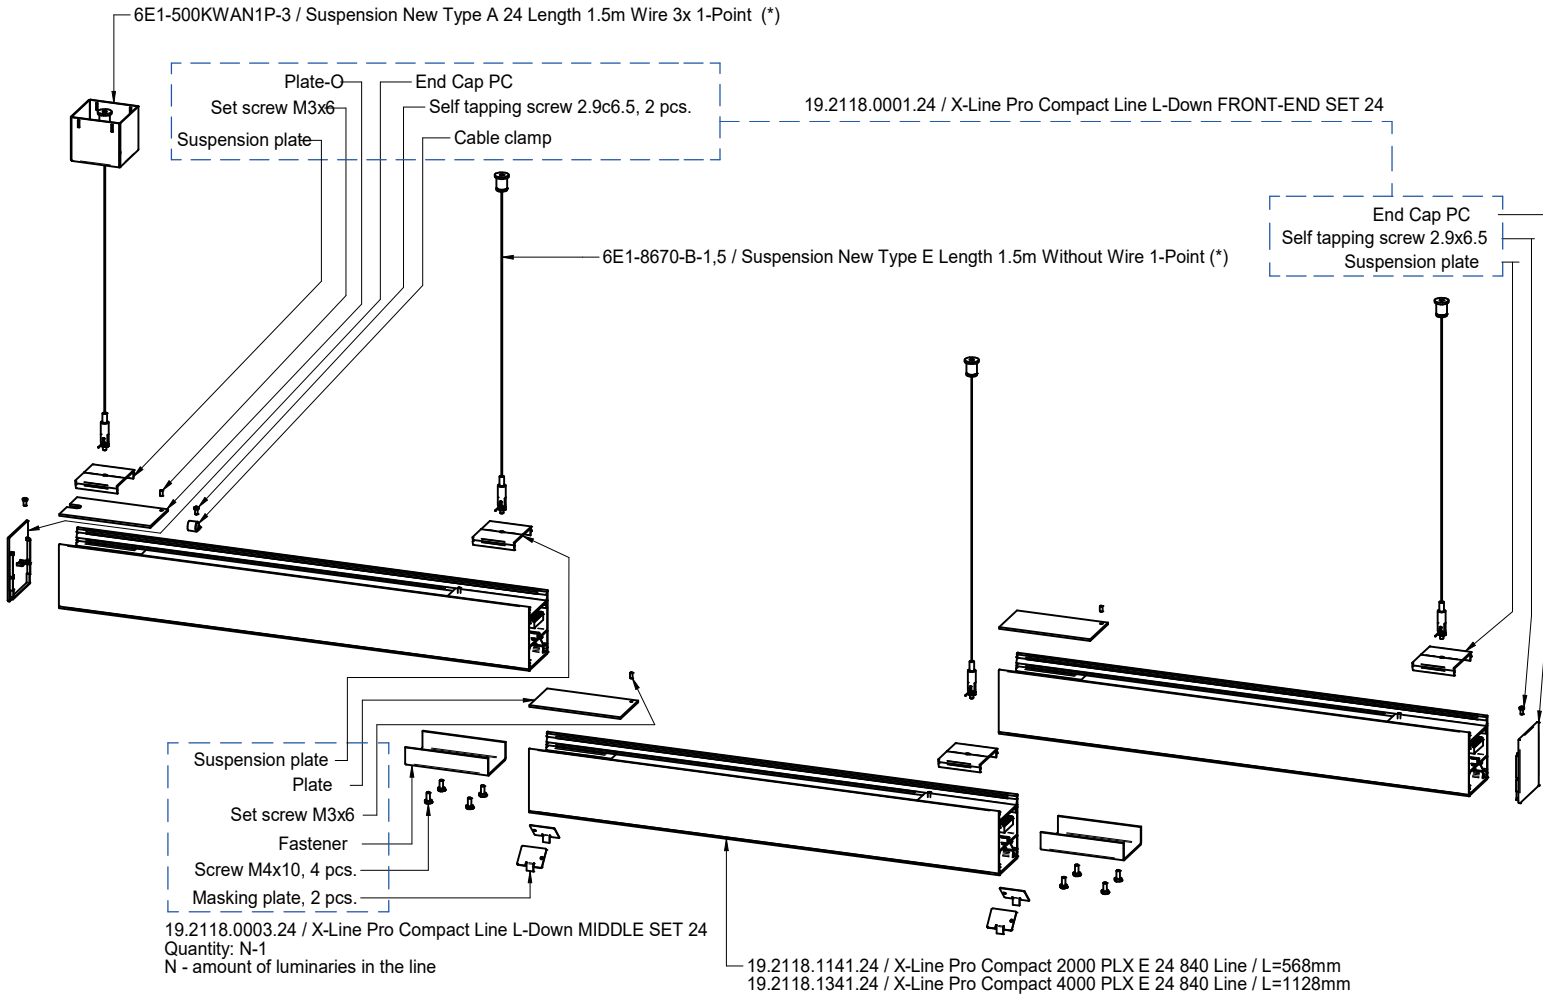


Two possible configuration of 10m lines:

- 1) 19.2118.1141.24 x18, 19.2118.0001.24, 19.2118.0003.24 x17, 6E1-500KWANP-3, 6E1-8670-B-1,5 x17, total line length 10248m.
- 2) 19.2118.1341.24 x9, 19.2118.0001.24, 19.2118.0003.24 x8, 6E1-500KWANP-3, 6E1-8670-B-1,5 x8, total line length 10156mm.

(*) For other suspensions, check www.luxiona.pl Products/accessories/suspension

Standard materials and their colours

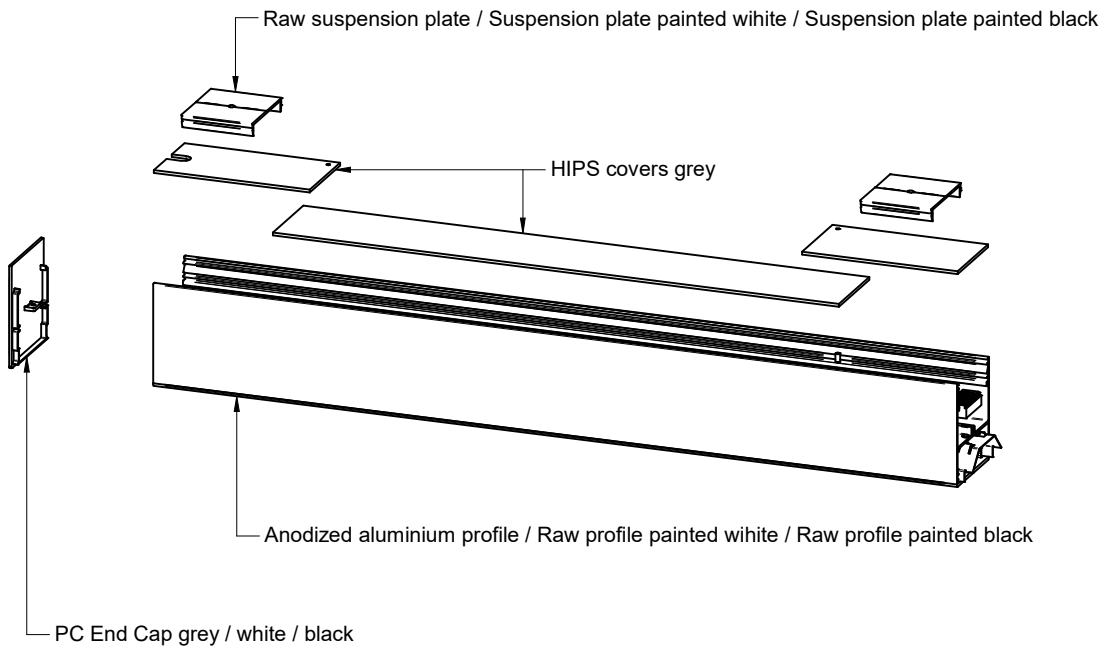

HIPS - High Impact Polystyrene
PC - Polycarbonate