



## X-LINE PRO LINE

Surface mounted luminaires



Light fitting made out of aluminium profile. Simple luminaire construction (no mounting plates or LED plates). LEDs in the standard version are mounted by inserting them into the slot in the middle of the profile. Direct (down) light distribution. Available optical systems: anti-glare louvre (silver, white or black on request). The luminaire is available in a line version. Available colors: anodized aluminum or any color from the RAL palette on request. Gray polycarbonate end caps, white or black on request. Plastic plate (HIPS) masking the electronics compartment (only in luminaires with direct distribution). Possibility to use an aluminum snap-on aluminum cover. The use of luminaires typically for offices.






## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE PRO 2000	2226	12,5	4000	560 x 60 x 70
X-LINE PRO 3000	3339	18,8	4000	840 x 60 x 70
X-LINE PRO 4000	4452	25,1	4000	1120 x 60 x 70
X-LINE PRO 6000	6678	37,6	4000	1680 x 60 x 70
X-LINE PRO 8000	8904	50,2	4000	2240 x 60 x 70

## Technical drawing:

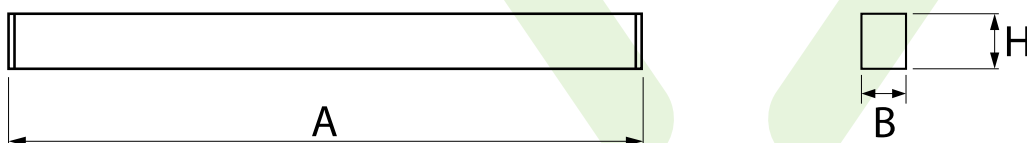

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	72000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 35
Driver	standard (E) DIM DALI (EDD) *


\* Variant to specify when ordering

## Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	anodised aluminum
Diffuser	RASTER (anti-glare louvre)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 23-12-2022

**Additional information:**

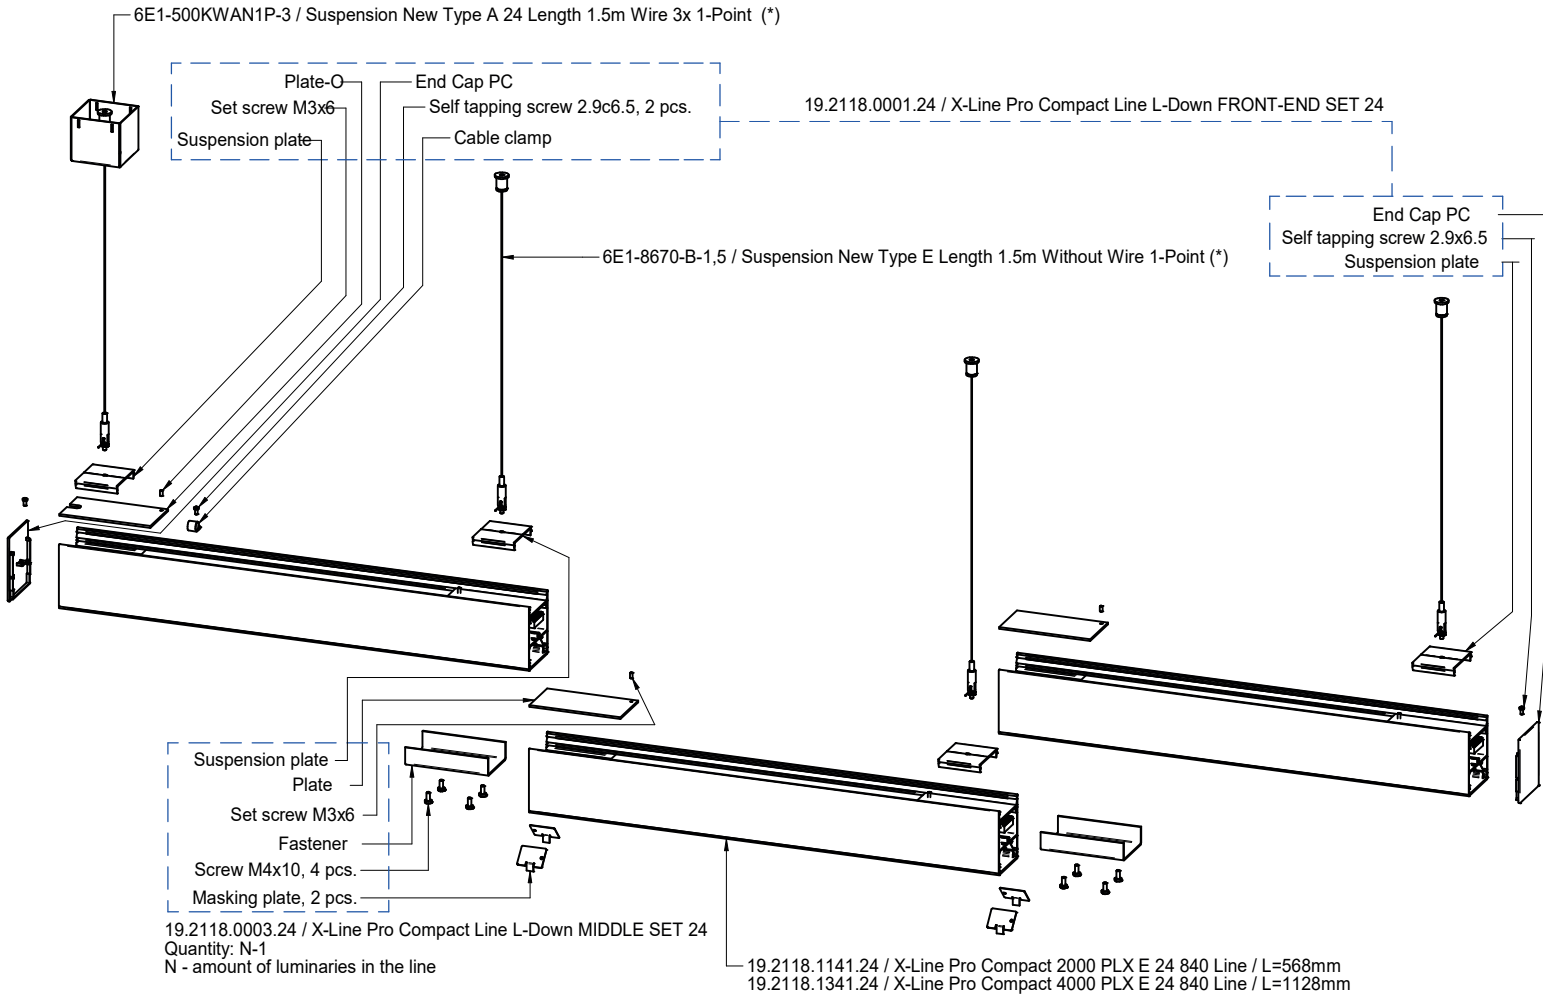


Two possible configuration of 10m lines:

- 1) 19.2118.1141.24 x18, 19.2118.0001.24, 19.2118.0003.24 x17, 6E1-500KWANP-3, 6E1-8670-B-1,5 x17, total line length 10248m.
- 2) 19.2118.1341.24 x9, 19.2118.0001.24, 19.2118.0003.24 x8, 6E1-500KWANP-3, 6E1-8670-B-1,5 x8, total line length 10156mm.

(\*) For other suspensions, check [www.luxiona.pl/Products/accessories/suspension](http://www.luxiona.pl/Products/accessories/suspension)

**Standard materials and their colours**

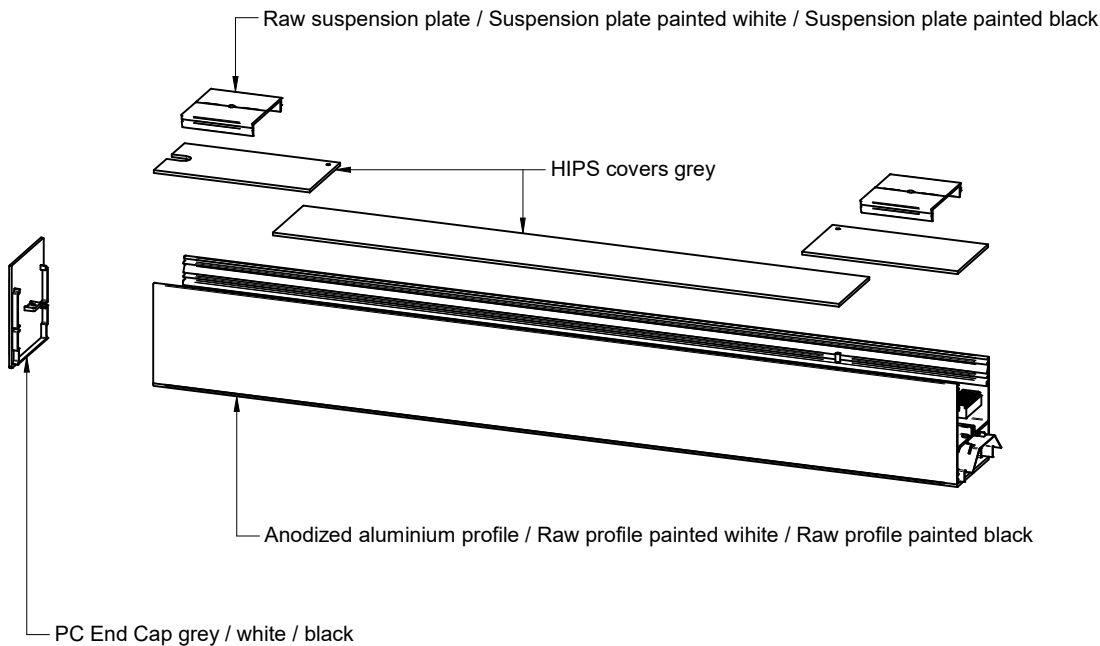

HIPS - High Impact Polystyrene  
PC - Polycarbonate