

Product: MINI WALL C LED UP&DOWN 2X1,7W 4000K E 21

Index: 19.3023.2001.21



Description

Aluminum made luminaire. Thanks to applied lenses of renowned producers there is possibility to arrange luminous flux UP/DOWN. MINI WALL C LED UP&DOWN is recommended to be installed as a decorative and accent lighting.

Product information


Category	Architectural luminaires
Family	MINI WALL C LED
Name	MINI WALL C LED UP&DOWN 2X1,7W 4000K E 21
Index	19.3023.2001.21



Light and electrical data


Light source	LED
Luminous flux LED [lm]	304
LED power [W]	3
Luminaire luminous flux [lm]	253
Power of luminaire [W]	5
Luminaire's light efficiency [lm/W]	50,6
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	5
Beam angle [°]	(C0-C180) / (C90-C270) - 9,6° / 37°
Protection against electric shock	I
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,5
Circuit load capacity	80 (B10), 157 (B16), 265 (C10), 317 (C16)

Mechanical data



Assembly	mounted on wall
Material	aluminum
Color	RAL 9006 (gray, metallic, fine structure)
Diffuser	transparent polycarbonate
Impact resistant	IK04
Weight [kg]	0,66
Dimensions [mm]	200 x 90 x 45

A graph of light

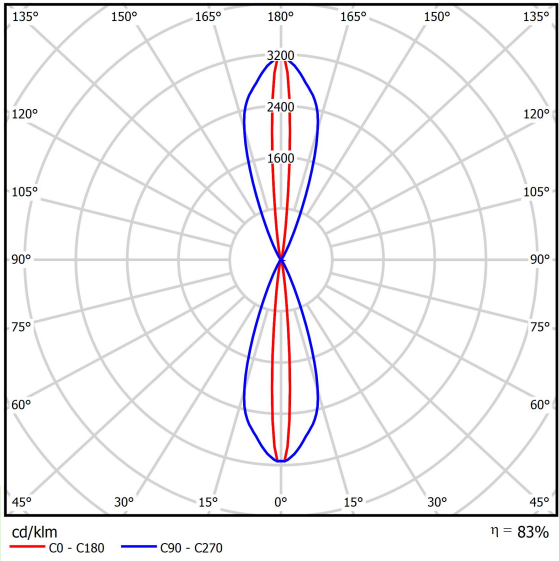

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 23-12-2022