


Product: X-LINE SURFACE 1x E27 PLX 34 / POD ŹRÓDŁO PARATHOM STICK Index: 19.3101.0002.34



Description

Luminaire for replaceable sources with a popular E27 base made of aluminum profile equipped with a opal diffuser. Installation depending on the version is ceiling mounted (X-Line Surface) or on the wall (X-Line Kinkiet). The luminaire must be equipped with a Parathome Stick source for the E27 base.

Product information

 Category
 Surface mounted luminaires

 Family
 X-LINE E27

 Name
 X-LINE SURFACE 1x E27 PLX 34 / POD ŹRÓDŁO PARATHOM STICK

 Index
 19.3101.0002.34

Light and electrical data

Μ


Light source LED E27 PARATHOM STICK (not included) Luminous flux LED [Im] depending on applied light source

250 x 63 x 74

			depending on applied light source
		LED power [W]	depending on applied light source
		Luminaire luminous flux [lm]	depending on applied light source
		Power of luminaire [W]	depending on applied light source
		Luminaire's light efficiency [lm/W]	depending on applied light source
		Color of the light [K]	depending on applied light source
		CRI	depending on applied light source
		SDCM (LED sources)	depending on applied light source
		Beam angle [°]	(C0-C180) / (C90-C270) - 113,2° / 114,4°
		Protection against electric shock	1
		Protection degree	IP44
		Voltage	220240 V, 5060 Hz
		Lifetime of LED sources [h]	depending on applied light source
		Lx/By	depending on applied light source
		Driver	none
lechanical data		Assembly	surface mounted on ceiling
	∏‡н	Material	aluminum
Α	l + → B	Color	RAL 9016 (white)
		Diffuser	PLX (PMMA opal)
		Impact resistant	IK04
		Weight [kg]	0,39

Dimensions [mm]

A graph of light

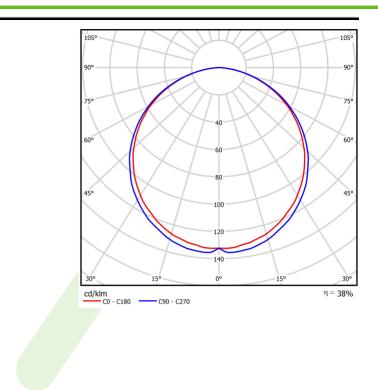



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 23-12-2022