

Product: AGALINE LED 3R 18000 OPTICS-1 E 34 IP65 840 / L-1550MM**Index:** 19.3121.0009.34

Description

Agaline 3R is a single linear luminaire designed for mounting on slings. The body is made of white powder-coated steel sheet. Optical system based on lenses providing different light distribution. High level of protection against penetration of dust and water - IP65. Agaline is an excellent solution for lighting industrial facilities and warehouses, but also finds application in offices, supermarkets and shops.

Product information


Category	Industrial luminaires
Family	AGALINE LED 3R
Name	AGALINE LED 3R 18000 OPTICS-1 E 34 IP65 840 / L-1550MM
Index	19.3121.0009.34



Light and electrical data

Light source	LED
Luminous flux LED [lm]	17700
LED power [W]	117
Luminaire luminous flux [lm]	17668
Power of luminaire [W]	131
Luminaire's light efficiency [lm/W]	134,9
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 68,2° / 69,4°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	>54000
Lx/By	L80B10
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	14 (B10), 22 (B16), 14 (C10), 22 (C16)

Mechanical data

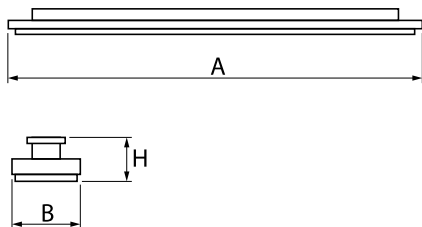

Assembly	surface mounted on slings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	OPTICS (optical system based on lenses)
Impact resistant	IK04
Dimensions [mm]	1550 x 95 x 68

A graph of light

