

Product: ATENA LINE NEW LED INDUSTRY 18000 SH WIDE E IP65 04 850 / HT50 Index: 19.3126.0002.04




Description

Industrial luminaire dedicated for ceiling mounting or for hanging mounting. Rectangular housing made of aluminum sheet. Only one colour available: RAL 9005 (black). Upon client request there is a possibility to make longer luminaire than standard dimensions. Consequently, the luminaire will have bigger luminous flux. The light sources are protected by diffuser made of hartened glass and the whole construction is characterized by high level of protection against dust and water penetration-IP65. Available accessories: electrical connectors of IP65 and clip for the hanging version. The product is recommended for production halls, warehouses and heavy industry. Permissible ambient temperature: -25° C - $+50^{\circ}$ C.

Product information	Category Industrial luminaires	Category Industrial luminaires	
	Family ATENA LINE NEW LED INC	FamilyATENA LINE NEW LED INDUSTRYNameATENA LINE NEW LED INDUSTRY 18000 SH WIDE E IP65 04 850 / HT50	
	Index 19.3126.0002.04		
Light and electrical data	Light source	LED	
	Luminous flux LED [Im]	17151	
	LED power [W]	104,5	
	Luminaire luminous flux [lm]	14968	
	Power of luminaire [W]	110	
	Luminaire's light efficiency [lm/W]	136,1	
	Color of the light [K]	5000	
	CRI	>80	
	SDCM (LED sources)	3	
	Beam angle [°]	(C0-C180) / (C90-C270) - 93,8° / 89,6°	
	Protection against electric shock	I	
	Protection degree	IP65	
	Voltage	220240 V, 5060 Hz	
	Lifetime of LED sources [h]	83000	
	Lx/By	L90/B10	
	Operating temperature range [°C]	-25 ÷ 50	
	Driver	standard on/off (E)	
	Power factor cos φ	>0,95	
	Circuit load capacity	14 (B10), 22 (B16), 14 (C10), 22 (C16)	
Mechanical data	Assembly directly surface	mounted to ceiling construction or mounted on slings	
	Material aluminu	Im	
	T Color RAL 90	05 (black)	
	Diffuser SH (trar	sparent hardened glass)	
	Impact resistant IK08		
	Dimensions [mm] 465 x 20	01 x 150	

A graph of light

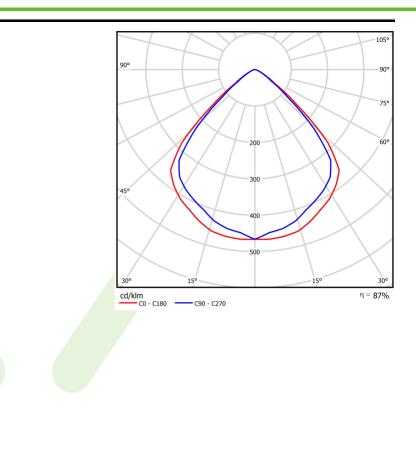



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 23-12-2022