

Product: RUBIN SPORT NEW LED 32000 MICRO-PRM KR E 34 830 / 1190X320 Index: 19.3135.0025.34



Description


Surface mounted luminary dedicated for the sports, gymnastics and squash halls, etc. Luminary equipped with the protecting grid made from steel wire powder coated. Diffuser used in the luminary provides less glare effect for the room users when compared to the light sources used in the fluorescents.

Product information	Ci	ategory	/ Industrial luminaires
	Fa	amily	RUBIN SPORT NEW LED
	Na	ame	RUBIN SPORT NEW LED 32000 MICRO-PRM KR E 34 830 / 1190X320
	In	Index	19.3135.0025.34
			$\overbrace{LED} \textcircled{\begin{tabular}{c}{c}{c}{c}{c}{c}{c}{c}{c}{c}{c}{c}{c}$

L

Light and electrical data	Light source	LED
3	Luminous flux LED [Im]	32208
	LED power [W]	204
	Luminaire luminous flux [lm]	24188
	Power of luminaire [W]	228
	Luminaire's light efficiency [lm/W]	106,1
	Color of the light [K]	3000 >80 3
	CRI	
	SDCM (LED sources)	
	Beam angle [°]	(C0-C180) / (C90-C270) - 90,2° / 99,6°
	Protection against electric shock	I
	Protection degree	IP20 220240 V, 5060 Hz
	Voltage	
	Lifetime of LED sources [h]	100000 (1) / 147000 (2)
	Lx/By	L80/B10 (1) / L70/B50 (2)
	Operating temperature range [°C	c] 5 ÷ 30
	Driver	standard on/off (E)
	Power factor $\cos \phi$	>0,95
	Circuit load capacity	7 (B10), 11 (B16), 7 (C10), 11 (C16)
Mechanical data	Assembly s	urface mounted on ceiling
B I I I I I I I I I I I I I I I I I I I	Material s	teel sheet
	Color R	AL 9016 (white)
	Diffuser N	licro-PRM (micro-prismatic diffuser PMMA)
	Impact resistant	IK10
A	Dimensions [mm] 1	190 x 320 x 60

A graph of light

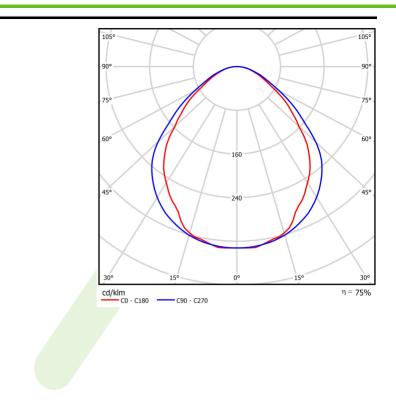



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 23-12-2022