

Product: KUBIK CEILING ECO LED 2X GU10 IP54 04 Index: 19.3148.0002.04



Description


Architectural luminaire designed for ceiling mounting. The body is made of aluminum. Interchangeable light sources with the popular GU10 socket. The ergonomic shapes of the luminaire allow the use of KUBIK in almost every building. Very easy assembly. Luminaire with IP54 protection rating.

Product information	n
---------------------	---

Cate	gory Outo	Outdoor luminaires					
Fami	ily KUB	KUBIK CEILING ECO LED					
Nam	e KUB	KUBIK CEILING ECO LED 2X GU10 IP54 04					
Index	x 19.3	48.0002.04					
			CE		IP ₅₄	IK ₀₄	

Light and electrical data	Light source	RETROFIT GU10 (not included)			
	Luminous flux LED [lm]	depending on applied light source			
	LED power [W]	depending on applied light source			
	Luminaire luminous flux [lm]	depending on applied light source			
	Power of luminaire [W]	depending on applied light source			
	Luminaire's light efficiency [lm/W]	depending on applied light source			
	Color of the light [K]	depending on applied light source			
	CRI	depending on applied light source			
	SDCM (LED sources)	depending on applied light source (C0-C180) / (C90-C270) - 111,4° / 111,4° I			
	Beam angle [°]				
	Protection against electric shock				
	Protection degree	IP54			
	Voltage	220240 V, 5060 Hz			
	Lifetime of LED sources [h]	depending on applied light source			
	Lx/By	depending on applied light source			
	Driver	none			
lechanical data	Assembly	surface mounted on ceiling			
	Material	aluminum			
	Color	RAL 9005 (black)			
Н	Diffuser	PC (opalescent polycarbonate)			
	Impact resistant	IK04			
В	Weight [kg]	1,17			
A	Dimensions [mm]	200 x 120 x 120			

A graph of light

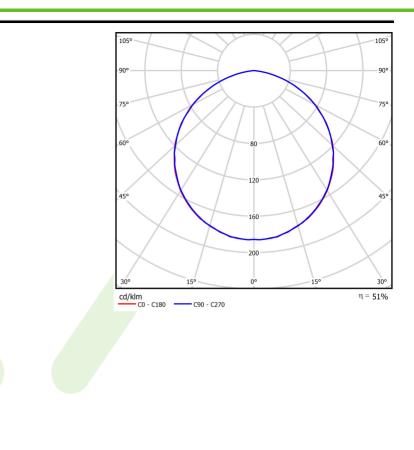



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 23-12-2022