

Product: KUBIK CEILING ECO LED 2X GU10 IP54 25 Index: 19.3148.0002.25



Description


Architectural luminaire designed for ceiling mounting. The body is made of aluminum. Interchangeable light sources with the popular GU10 socket. The ergonomic shapes of the luminaire allow the use of KUBIK in almost every building. Very easy assembly. Luminaire with IP54 protection rating.

Product i	inform	ation
------------------	--------	-------

Category	Outdoor luminaires		
Family	KUBIK CEILING ECO LED		
Name	KUBIK CEILING ECO LED 2X GU10 IP54 25		
Index	19.3148.0002.25		
	$\bigcirc \square \square$		

Light and electrical data	Light source	RETROFIT GU10 (not included)
Light and blobthoal data	Luminous flux LED [lm]	depending on applied light source
	LED power [W]	depending on applied light source
	Luminaire luminous flux [Im]	depending on applied light source
	Power of luminaire [W]	depending on applied light source
	Luminaire's light efficiency [li	
	Color of the light [K]	depending on applied light source
		depending on applied light source
	SDCM (LED sources)	depending on applied light source
	Beam angle [°]	(C0-C180) / (C90-C270) - 111,4° / 111,4°
	Protection against electric sh	
	Protection degree	IP54
	Voltage	220240 V, 5060 Hz
	Lifetime of LED sources [h]	depending on applied light source
	Lx/By	depending on applied light source
	Driver	none
Mechanical data	Assembly	surface mounted on ceiling
Н	Material	aluminum
	Color	RAL 7016 (anthracite, metallic, fine structure)
	Diffuser	PC (opalescent polycarbonate)
	Impact resistant	IK04
В	Weight [kg]	1,2
	Dimensions [mm]	200 x 120 x 120

A graph of light

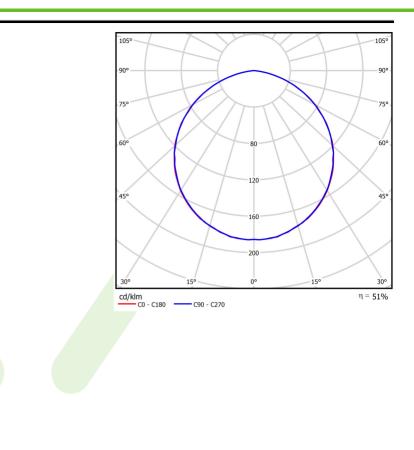



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 23-12-2022