

**Product:** KUBIK CEILING SHORT LED 2X2,4W PC 4000K E IP65 21**Index:** 19.3150.0004.21

## Description

An outdoor fitting designed for ceiling mounting. The body is made of aluminum. Energy-efficient fitting made of component parts produced by renowned companies. Ergonomic shapes of the fitting enable the application of the Kubik-type fitting almost in every building. The assembly is very easy. Level of protection against penetration of dust and water - IP65.

## Product information

Category	Outdoor luminaires
Family	KUBIK CEILING SHORT LED
Name	KUBIK CEILING SHORT LED 2X2,4W PC 4000K E IP65 21
Index	19.3150.0004.21



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	374
LED power [W]	5
Luminaire luminous flux [lm]	160
Power of luminaire [W]	7
Luminaire's light efficiency [lm/W]	22,9
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	5
Beam angle [°]	(C0-C180) / (C90-C270) - 111,4° / 111,4°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,5
Circuit load capacity	80 (B10), 157 (B16), 265 (C10), 317 (C16)

## Mechanical data



Assembly	surface mounted on ceiling
Material	aluminum
Color	RAL 9006 (gray, metallic, fine structure)
Diffuser	PC (opalescent polycarbonate)
Impact resistant	IK04
Weight [kg]	0,5
Dimensions [mm]	100 x 100 x 120

## A graph of light

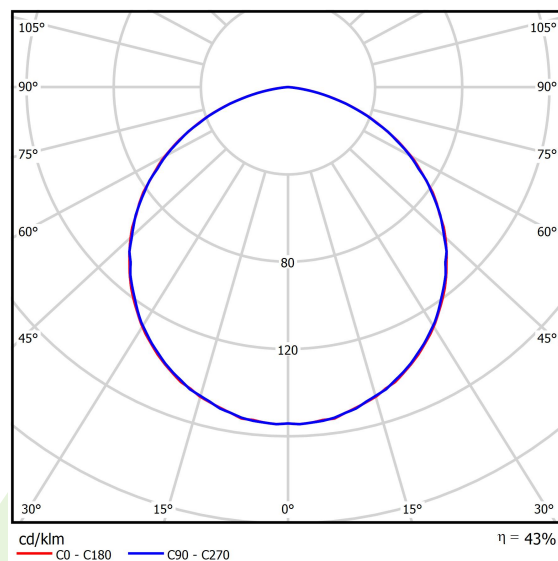

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 23-12-2022