

**Product:** KUBIK WALL ECO LED UP&DOWN 1X G9 IP54 25

**Index:** 19.3165.0003.25



## Description

Luminaire for removable LED sources, called Retrofit, matching the G9 holder. The body is made of aluminum painted with a special facade paint resistant to weather conditions. PMMA opal. Very easy assembly and access to the interior. Recommended for balconies lighting.

## Product information


Category	Outdoor luminaires
Family	KUBIK WALL ECO LED IP54
Name	KUBIK WALL ECO LED UP&DOWN 1X G9 IP54 25
Index	19.3165.0003.25



## Light and electrical data


Light source	RETROFIT G9 (not included)
Luminous flux LED [lm]	depending on applied light source
LED power [W]	depending on applied light source
Luminaire luminous flux [lm]	depending on applied light source
Power of luminaire [W]	depending on applied light source
Luminaire's light efficiency [lm/W]	depending on applied light source
Color of the light [K]	depending on applied light source
CRI	depending on applied light source
SDCM (LED sources)	depending on applied light source
Beam angle [°]	(C0-C180) / (C90-C270) - 109° / 107,2°
Protection against electric shock	I
Protection degree	IP54
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	depending on applied light source
Lx/By	depending on applied light source
Driver	none

## Mechanical data



Assembly	mounted on wall
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure)
Diffuser	PMMA opal
Weight [kg]	0,5
Dimensions [mm]	100 x 100 x 110

## A graph of light

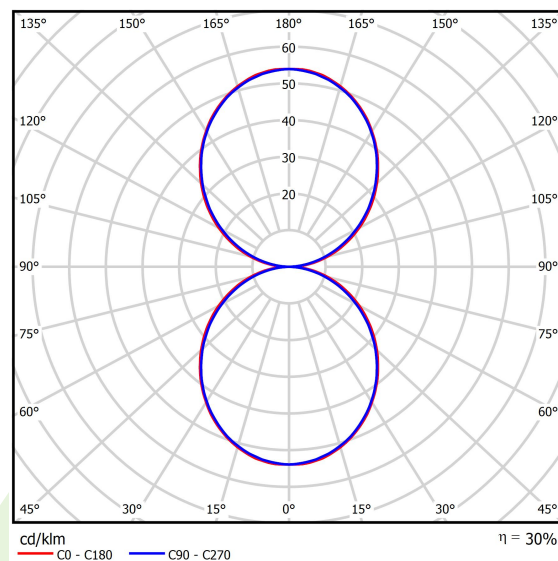

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 23-12-2022