

Product: AGAT CLEAN-ECO LED CRI95 14400 SHM EDD IP65 940 / 1200X600 Index: 19.3197.0024.34



Description

LUXIONA Poland as the only company in Europe has obtained CRI>95 for its luminaries (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering "deep red" color, and R13 responsible for rendering "light orange" color). Luminary designed to module suspended ceilings, equipped with the highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.


Product	information


Category	/ Clean luminaires CRI95	
Family	AGAT CLEAN-ECO LED CRI95	
Name	AGAT CLEAN-ECO LED CRI95 14400 SHM EDD IP65 940 / 1200X600	
Index	19.3197.0024.34	

Light and electrical data

Light source	LED
Luminous flux LED [lm]	15666
LED power [W]	99,2
Luminaire luminous flux [Im]	13053
Power of luminaire [W]	102,5
Luminaire's light efficiency [lm/W]	127,3
Color of the light [K]	4000
CRI	>95
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 98,8° / 102°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor $\cos \phi$	>0,95
Circuit load capacity	7 (B10), 11 (B16), 11 (C10), 17 (C16)



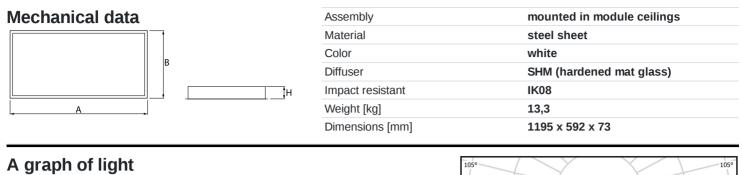



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 23-12-2022