

**Product:** BERYL SURFACE NEW LED K-1/L2 1800 MICRO-PRM EDD 04 840

**Index:** 19.4038.2123.04



## Description

Downlight surface mounted luminaire made of cast aluminum. Luminaire is dedicated for prestigious interiors such as hotels, banks and offices of higher standard. Owing to the newest components and renowned producers of LEDs applied it was possible to build such luminaires which save energy consumption comparing with traditional solutions. The luminaire has the ability to adjust the optics in two planes (in the vertical axis by 359° and to the left and right 15°). Note: the color of the frame and housing has a slightly different shade than the color of the inner reflector cover.

## Product information


|          |  |
|----------|--|
| Category | Surface mounted luminaires                             |
| Family   | BERYL SURFACE NEW LED K/L2                             |
| Name     | BERYL SURFACE NEW LED K-1/L2 1800 MICRO-PRM EDD 04 840 |
| Index    | 19.4038.2123.04  |



## Light and electrical data

|                                     |   |
|-------------------------------------|---|
| Light source                        | LED                                     |
| Luminous flux LED [lm]              | 4116                                    |
| LED power [W]                       | 22,6                                    |
| Luminaire luminous flux [lm]        | 2726                                    |
| Power of luminaire [W]              | 25,6                                    |
| Luminaire's light efficiency [lm/W] | 106,5                                   |
| Color of the light [K]              | 4000                                    |
| CRI                                 | 85                                      |
| SDCM (LED sources)                  | 2                                       |
| Beam angle [°]                      | (C0-C180) / (C90-C270) - 76,4° / 77,6°  |
| Protection against electric shock   | II                                      |
| Protection degree                   | IP20                                    |
| Voltage                             | 220..240 V, 50..60 Hz                   |
| Lifetime of LED sources [h]         | 83000 (1) / 100000 (2) / 100000 (3)     |
| Lx/By                               | L90/B10 (1) / L80/B10 (2) / L70/B10 (3) |
| Operating temperature range [°C]    | 5 ÷ 30                                  |
| Driver                              | DIM DALI (EDD)                          |
| Power factor cos φ                  | >0,95                                   |
| Circuit load capacity               | 50 (B10), 80 (B16), 61 (C10), 98 (C16)  |

## Mechanical data

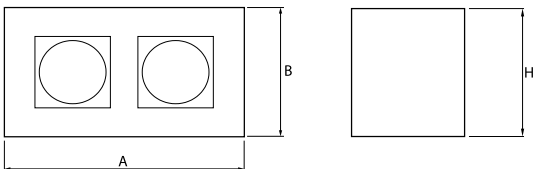

|                  |   |
|------------------|---|
| Assembly         | surface mounted on ceiling                |
| Material         | aluminum                                  |
| Color            | RAL 9005 (black)                          |
| Diffuser         | Micro-PRM (micro-prismatic diffuser PMMA) |
| Impact resistant | IK04                                      |
| Weight [kg]      | 2,5                                       |
| Dimensions [mm]  | 251 x 130 x 155                           |

## A graph of light

