

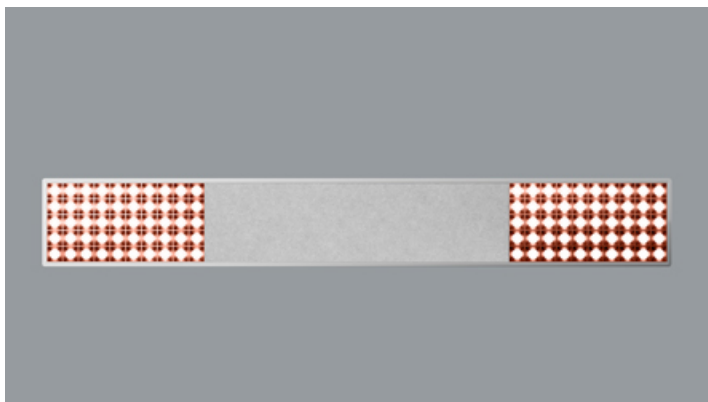
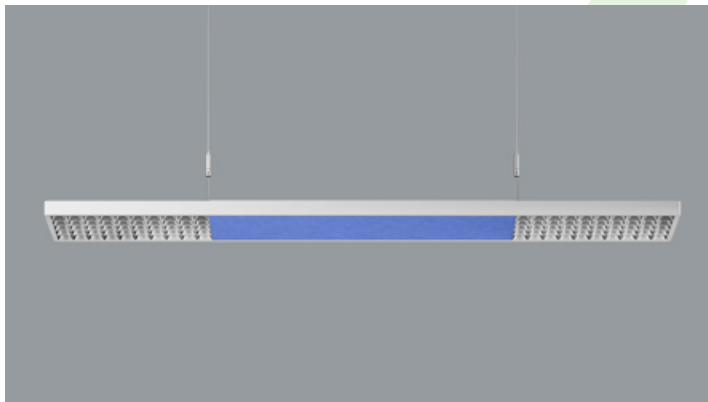


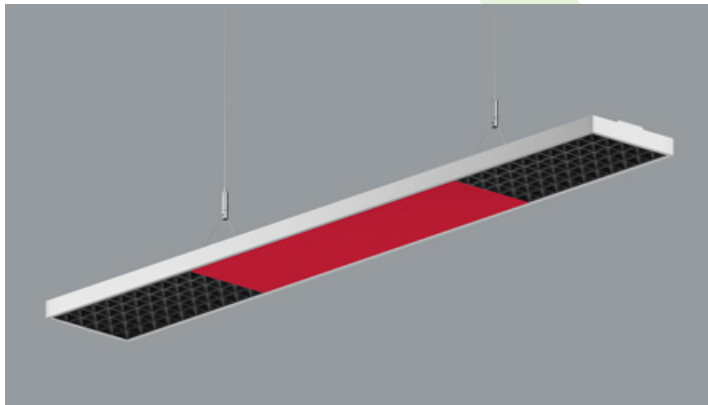

## TUSET L-DOWN LED SOUND ABSORBENT

Architectural luminaires

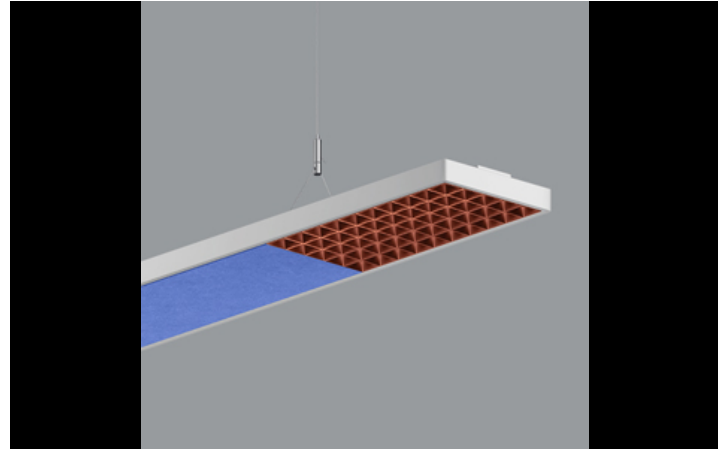

Luminaire specially designed for offices, with a distinctive and exclusive geometry, with the best lighting performance and very high durability. The optical system is a high-performance louvre with direct light emission (down). Minimum glare and maximum luminous flux combined in the version with louvre. Reduced profile metal enclosure, allowing spaces to be enriched with an exclusive design, without giving up the integration of the luminaire with the interior design, thanks to the wide range of possibilities for customizing the combination of body-louvre colours. Luminaire fitted with a PET acoustic panel mounted in the centre of the luminaire, between the louvres.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
TUSET L-DOWN LED 5000 SOUND ABSORBENT RED	5512,5	29,6	4000	1198 x 168 x 42
TUSET L-DOWN LED 5000 SOUND ABSORBENT BLUE	5512,5	29,6	4000	1198 x 168 x 42
TUSET L-DOWN LED 5000 SOUND ABSORBENT GREY	5512,5	29,6	4000	1198 x 168 x 42

## Technical drawing:



A

□ ±]

B

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	102000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 35
Driver	standard on/off (E)
Power factor cos φ	>0,95

## Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	anodised aluminum
Diffuser	LOUVER SILVER (louver in silver) LOUVER BLACK (louver in black) LOUVER COPPER (louver in copper)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-12-2024