




TYTAN STALACTITE SLIM

Architectural luminaires








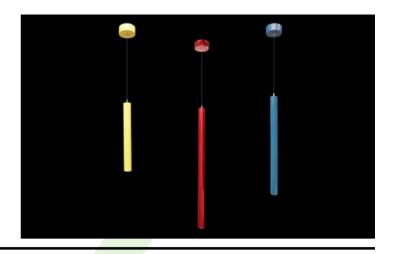

Suspended luminaire with spot lighting, performing decorative functions or additional light. The longitudinal tubular housing made of aluminum. Various length variants, a large color palette allowing for different colors for the designed interiors and adjustable suspension height are available for selection. Application: restaurants and cafes, dining rooms and kitchens, representative receptions, waiting rooms.

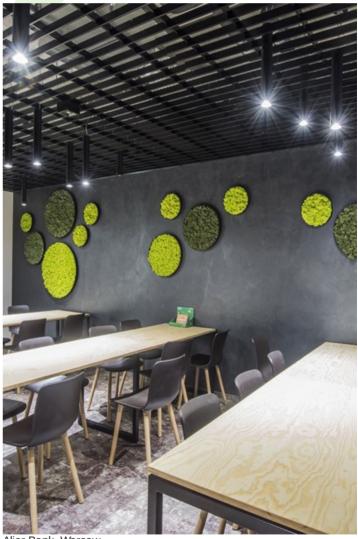

Alior Bank, Warsaw

















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
TYTAN STALACTITE SLIM 1000	1055	9	4000	Ø45 x 400 / Ø45 x 600 / Ø45 x 800

Technical drawing:



Light and electrical features:

Light source	LED		
Voltage	220240 V, 5060 Hz		
Lifetime of LED sources [h]	>100000		
Lx/By	L80/B10		
CRI	>80		
SDCM (LED sources)	2		
Operating temperature range [°C]	5 ÷ 30		
Driver	standard on/off (E)		
Power factor cos φ	>0,95		

Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	RAL 3011 (dark red)