




## X-LINE G/K LED CONNECTOR L

Recessed luminaires



The group of X-line luminaires is made of aluminum profile with opal diffuser or micro-prismatic diffuser. The luminaires may be joined with special connectors providing great freedom in arranging elements of the system and its functionality.

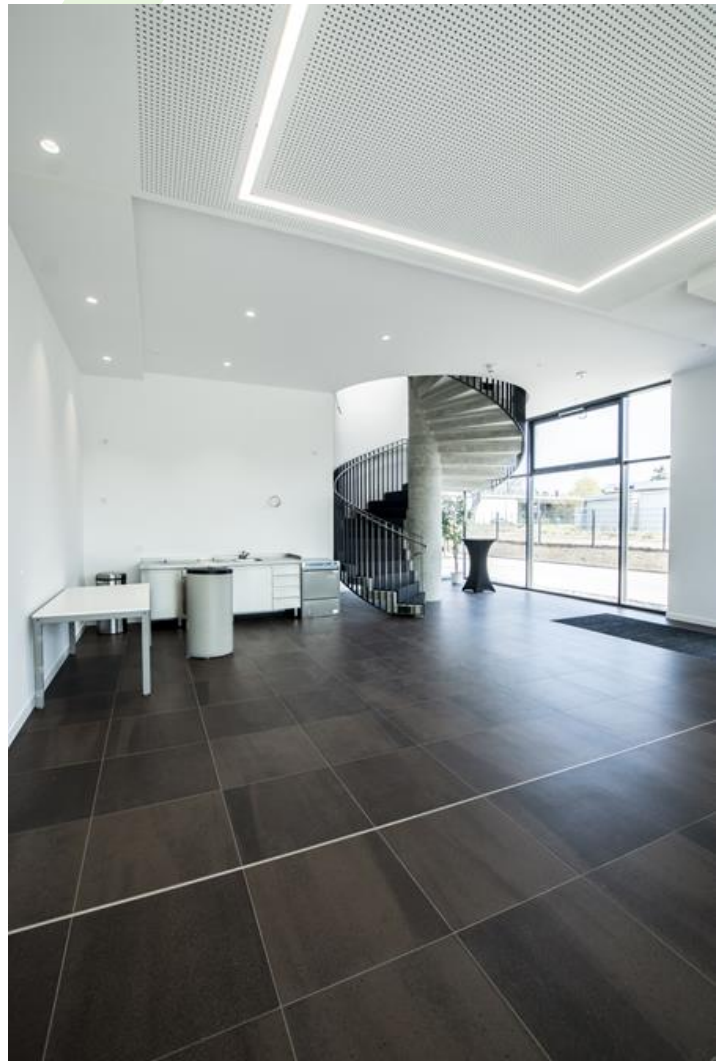


Grimm, Berlin



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE G/K LED 1950	1895 / 1964	11,1	3000 / 4000	603 x 323 x 134
X-LINE G/K LED 2600	2525 / 2617	14,4	3000 / 4000	603 x 603 x 134
X-LINE G/K LED 3300	3316 / 3436	19,2	3000 / 4000	603 x 323 x 134
X-LINE G/K LED 4400	4406 / 4565	24,7	3000 / 4000	603 x 603 x 134

**Technical drawing:**



### Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000 (1) / 147000 (2)
<b>Lx/By</b>	L80/B10 (1) / L70/B50 (2)
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Operating temperature range [°C]</b>	5 ÷ 30
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

### Mechanical features:

<b>Assembly</b>	mounted in plasterboard ceilings
<b>Material</b>	aluminum
<b>Color</b>	anodised aluminum
<b>Diffuser</b>	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

### Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-04-2026