






### X-LINE G/K LED CONNECTOR X

#### **Recessed luminaires**

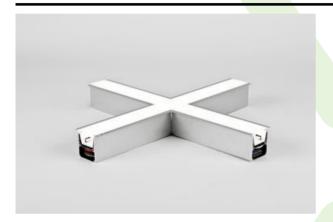

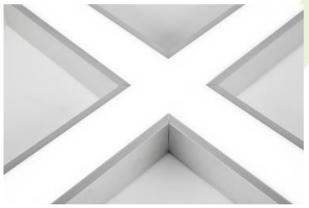



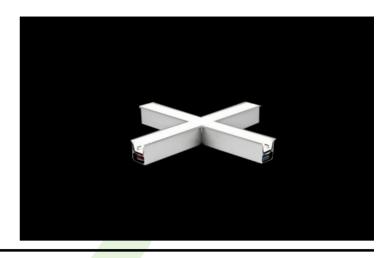

The group of X-line luminaries is made of aluminum profile with opal diffuser or micro-prismatic diffuser. The luminaries may be joined with special connectors providing great freedom in arranging elements of the system and its functionality.


















### Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE G/K LED 5200	5051 / 5234	28,2	3000 / 4000	1126 x 1126 x 134
X-LINE G/K LED 8800	8811 / 9130	49,1	3000 / 4000	1126 x 1126 x 134

## **Technical drawing:**



# Light and electrical features:

Light source	LED			
Voltage	220240 V, 5060 Hz			
Lifetime of LED sources [h]	100000 (1) / 147000 (2)			
Lx/By	L80/B10 (1) / L70/B50 (2)			
CRI	>80			
SDCM (LED sources)	3			
Operating temperature range [°C]	5 ÷ 30			
Driver	standard on/off (E) DIM DALI (EDD) *			
Power factor cos φ	>0,95			

<sup>\*</sup> Variant to specify when ordering

### **Mechanical features:**

Assembly	mounted in plasterboard ceilings		
Material	aluminum		
Color	anodised aluminum		
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)		

### **Additional information:**

The luminaire can be made in CLO version.