




X-LINE LED COMPACT

Compact







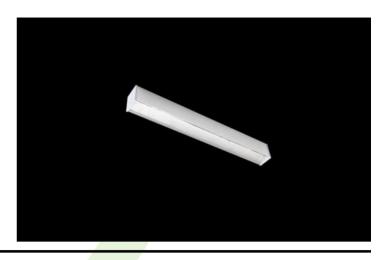

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver. X-LINE fittings are intended to be mounted on ceiling or pendants. In the family of X-LINE LED fittings modules of renowned brands are applied.



Trade Fair and Exhibition Center, Bydgoszcz



















Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|-------------------------|------------------------|------------------------|-------------|---------------------------------|
| X-LINE LED COMPACT 2000 | 2302 | 14 | 4000 | 572 x 63 x 74 |
| X-LINE LED COMPACT 2600 | 3058 / 2590 / 2877 | 16,4 / 16,5 | 4000 / 3000 | 1132 x 63 x 74 / 1412 x 63 x 74 |
| X-LINE LED COMPACT 4000 | 4118 | 27 | 4000 | 1132 x 63 x 74 / 1412 x 63 x 74 |
| X-LINE LED COMPACT 5500 | 5200 / 5777 | 32 | 3000 / 4000 | 1412 x 63 x 74 |
| X-LINE LED COMPACT 6000 | 6240 | 43 | 4000 | 1412 x 63 x 74 |

Technical drawing:





Light and electrical features:

| Light source | LED | | |
|----------------------------------|---------------------|--|--|
| Voltage | 220240 V, 5060 Hz | | |
| Lifetime of LED sources [h] | 60000/90000 | | |
| Lx/By | L80/B10 | | |
| CRI | >80 | | |
| SDCM (LED sources) | 3 | | |
| Operating temperature range [°C] | 5 ÷ 30 | | |
| Driver | standard on/off (E) | | |
| Power factor $\cos \phi$ | >0,95 >0,98 * | | |

^{*} Variant to specify when ordering

Mechanical features:

| Assembly | directly mounted to ceiling construction or surface mounted on slings using accessories |
|----------|---|
| Material | aluminum |
| Color | anodised aluminum RAL 9005 (black) RAL 9016 (white) * |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal) |