




X-LINE LED LINE

Surface mounted luminaires



Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver. X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaires are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

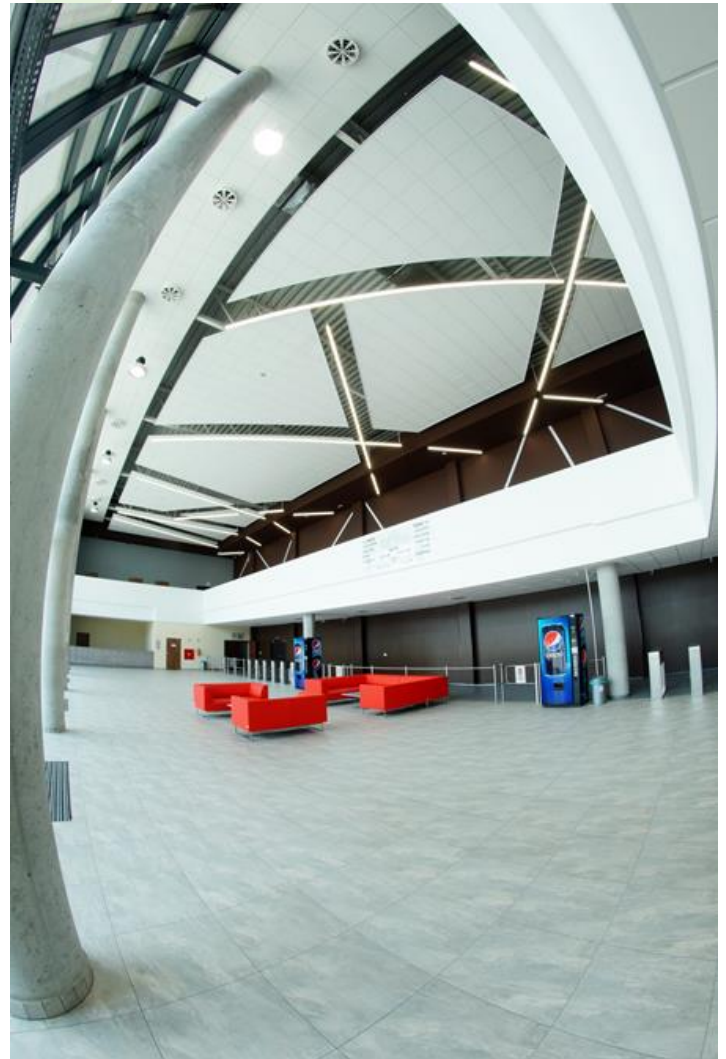


Trade Fair and Exhibition Center, Bydgoszcz



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE LED 1300	1349 / 1420	9	3000 / 4000	567 x 63 x 74 / 562 x 63 x 74
X-LINE LED 2200	2203 / 2283	12,6	3000 / 4000	567 x 63 x 74 / 562 x 63 x 74
X-LINE LED 2600	2525 / 2617	14,4	3000 / 4000	1127 x 63 x 74 / 1122 x 63 x 74
X-LINE LED 3250	3158 / 3273	18,3	3000 / 4000	1407 x 63 x 74 / 1402 x 63 x 74
X-LINE LED 3900	3788 / 3926	21,7	3000 / 4000	1687 x 63 x 74 / 1682 x 63 x 74
X-LINE LED 4400	4565 / 4406	24,7	4000 / 3000	1127 x 63 x 74 / 1122 x 63 x 74
X-LINE LED 5200	5051 / 5234	28,2	3000 / 4000	2247 x 63 x 74 / 2242 x 63 x 74
X-LINE LED 5500	5526 / 5727	30,5	3000 / 4000	1407 x 63 x 74 / 1402 x 63 x 74
X-LINE LED 6600	6608	35,3	3000	1687 x 63 x 74
X-LINE LED 6600	6848 / 6608	35,3	4000 / 3000	1687 x 63 x 74 / 1682 x 63 x 74
X-LINE LED 8800	9130 / 8811	49,1 / 49	4000 / 3000	2247 x 63 x 74 / 2242 x 63 x 74

Technical drawing:

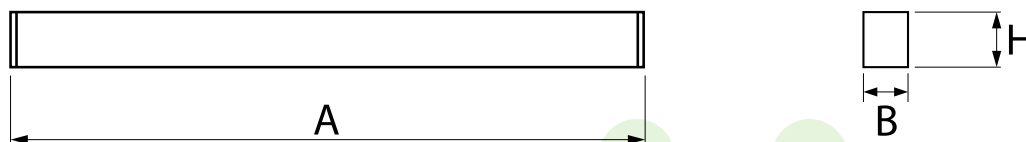

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,9 >0,95 *

* Variant to specify when ordering

Mechanical features:

Assembly	directly mounted to ceiling construction or surface mounted on slings
Material	aluminum
Color	anodised aluminum
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

Additional information:

Information about minimum number of slings required to mount particular light lines is available on the following page. The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 07-05-2025

Dodatkowe informacje / Additional information / Zusätzliche Informationen:

*S - minimalna ilość zawieszń / rozmieszczenie
 - the minimum number of suspensions / placement

Φ [m]	S*	
1300	a	(a)
2200	a	
2600	a	
4400	a	
3250	a	
3900	a	(b)
6600	a	
5200	b	
8800	b	
11000	c	
13200	c	(c)