





X-LINE LED

Surface mounted luminaires

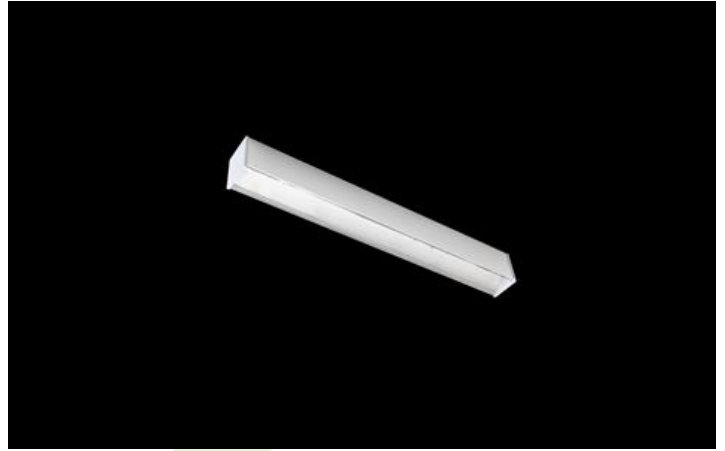

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver. X-LINE fittings are intended to be mounted on ceiling or pendants. In the family of X-LINE LED fittings modules of renowned brands are applied.

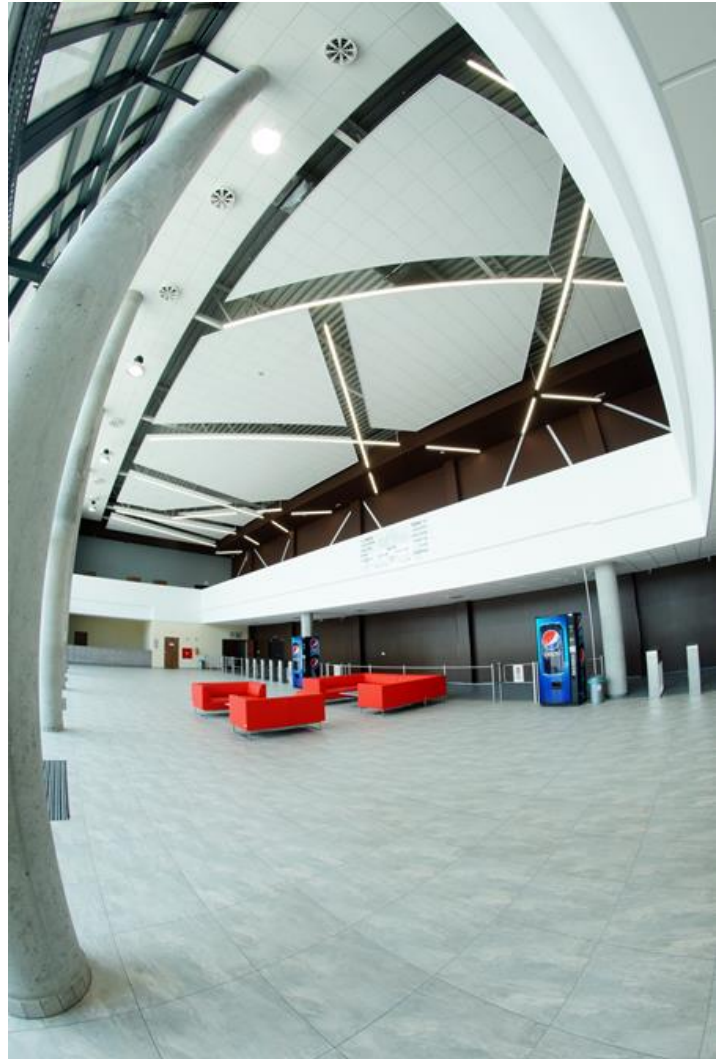

Trade Fair and Exhibition Center, Bydgoszcz



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|-------------------------------|-------------------------|------------------------|-------------|---------------------------|
| X-LINE LED 1300 | 1349 / 1420 | 9 | 3000 / 4000 | 572 x 63 x 74 |
| X-LINE LED 2200 | 2203 / 2283 | 12,6 | 3000 / 4000 | 572 x 63 x 74 |
| X-LINE LED 2600 | 2617 / 2525 | 14,4 | 4000 / 3000 | 1132 x 63 x 74 |
| X-LINE LED 3250 | 3158 / 3273 | 18,3 | 3000 / 4000 | 1412 x 63 x 74 |
| X-LINE LED 3900 | 3788 / 3926 | 21,7 | 3000 / 4000 | 1692 x 63 x 74 |
| X-LINE LED 4400 | 4406 / 4565 | 24,7 | 3000 / 4000 | 1132 x 63 x 74 |
| X-LINE LED 4400 TUNABLE WHITE | 4304÷4574 (2700÷6500 K) | 30÷32 (6500÷2700 K) | 2700 ÷ 6500 | 1132 x 63 x 74 |
| X-LINE LED 5200 | 5051 / 5234 | 28,2 | 3000 / 4000 | 2252 x 63 x 74 |
| X-LINE LED 5500 | 5526 / 5727 | 30,5 | 3000 / 4000 | 1412 x 63 x 74 |
| X-LINE LED 6500 | 6314 / 6543 | 34,8 | 3000 / 4000 | 2814 x 63 x 74 |
| X-LINE LED 6600 | 6848 / 6608 | 35,3 | 4000 / 3000 | 1692 x 63 x 74 |
| X-LINE LED 8800 | 8811 / 9130 | 49,1 | 3000 / 4000 | 2252 x 63 x 74 |
| X-LINE LED 8800 TUNABLE WHITE | 8608÷9148 (2700÷6500 K) | 60÷64 (6500÷2700 K) | 2700 ÷ 6500 | 2252 x 63 x 74 |

Technical drawing:



Light and electrical features:

| | |
|---|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 (1) / 147000 (2)/50000 |
| Lx/By | L80/B10 (1) / L70/B50 (2)/L80/B10 |
| CRI | >80/>75 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,9 >0,95 * |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|--|
| Assembly | directly mounted to ceiling construction or surface mounted on slings using accessories |
| Material | aluminum |
| Color | anodised aluminum |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal) |

Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-11-2024