



## X-LINE SLIGHT LED LINE

---

Surface mounted luminaires

---





Linear luminaire with minimized width. Made of 34 mm wide and 68 mm high aluminum profile. Mounted on slings. Direct light distribution. The optical system is fulfilled by an aperture recessed into the body, facing the end cap. Available opal smooth or microprismatic diffuser made of PMMA. Luminaire in system version. Available colours: anodized aluminum, black (RAL 9005), grey (RAL 9006), white (RAL 9016) or any RAL colour on request. End cap aluminum, painted in the colour of the body. Application of luminaires typically for offices, public spaces, community areas in multi-family buildings.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE SLIGHT L-DOWN LED 1300 LINE-BM	1403,7 / 1508,9	8,6	3000 / 4000	568 x 34 x 68 / 570 x 34 x 68 / 570 x 34 x 70
X-LINE SLIGHT L-DOWN LED 1300 LINE-S	1403,7 / 1508,9	8,6	3000 / 4000	568 x 34 x 68
X-LINE SLIGHT L-DOWN LED 2200 LINE-BM	2228,1 / 2395,1	13,4	3000 / 4000	568 x 34 x 68 / 570 x 34 x 68 / 570 x 34 x 70
X-LINE SLIGHT L-DOWN LED 2200 LINE-S	2228,1 / 2395,1	13,4	3000 / 4000	568 x 34 x 68
X-LINE SLIGHT L-DOWN LED 2600 LINE-BM	2808 / 3018	15,7	3000 / 4000	1132 x 34 x 68 / 1130 x 34 x 68
X-LINE SLIGHT L-DOWN LED 2600 LINE-S	2808 / 3018	15,7	3000 / 4000	1130 x 34 x 68
X-LINE SLIGHT L-DOWN LED 3900 LINE-BM	4212 / 4527	23,5	3000 / 4000	1691 x 34 x 68
X-LINE SLIGHT L-DOWN LED 3900 LINE-S	4212 / 4527	23,5	3000 / 4000	1689 x 34 x 68
X-LINE SLIGHT L-DOWN LED 4400 LINE-BM	4456 / 4790	25,9	3000 / 4000	1132 x 34 x 68
X-LINE SLIGHT L-DOWN LED 4400 LINE-S	4456 / 4790	25,9	3000 / 4000	1130 x 34 x 68
X-LINE SLIGHT L-DOWN LED 5200 LINE-BM	5616 / 6036	31,4	3000 / 4000	2254 x 34 x 68
X-LINE SLIGHT L-DOWN LED 5200 LINE-S	5616 / 6036	31,4	3000 / 4000	2252 x 34 x 68
X-LINE SLIGHT L-DOWN LED 6600 LINE-BM	6684 / 7185	38,9	3000 / 4000	1691 x 34 x 68
X-LINE SLIGHT L-DOWN LED 6600 LINE-S	6684 / 7185	38,9	3000 / 4000	1689 x 34 x 68
X-LINE SLIGHT L-DOWN LED 8800 LINE-BM	8912 / 9580	51,8	3000 / 4000	2254 x 34 x 68
X-LINE SLIGHT L-DOWN LED 8800 LINE-S	8912 / 9580	51,8	3000 / 4000	2252 x 34 x 68

## Technical drawing:

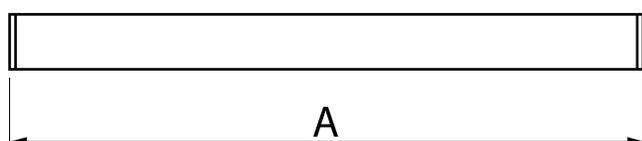

## Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	80000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	5 ÷ 35
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

## Mechanical features:

<b>Assembly</b>	surface mounted on slings
<b>Material</b>	aluminum
<b>Color</b>	RAL 9005 (black) RAL 9006 (grey) anodised aluminum RAL 9016 (white) *
<b>Diffuser</b>	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 07-05-2026