

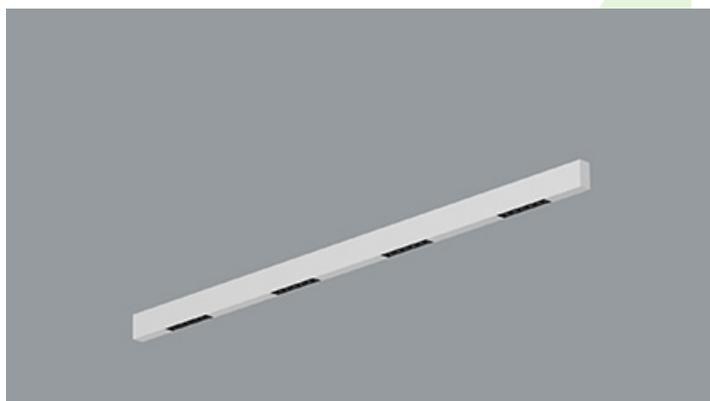


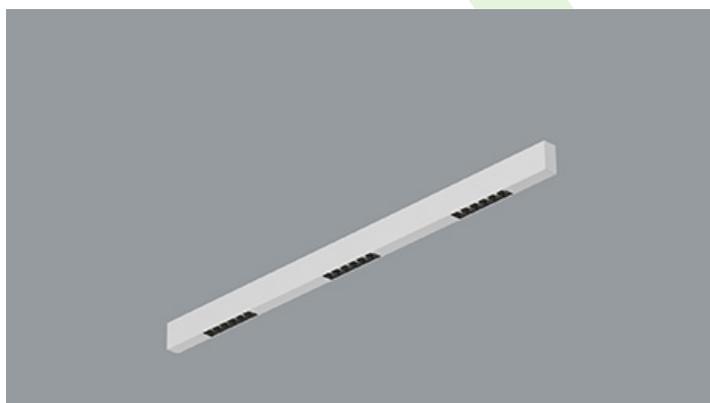

## X-LINE SLIGHT SURFACE LOW UGR LED

Surface mounted luminaires

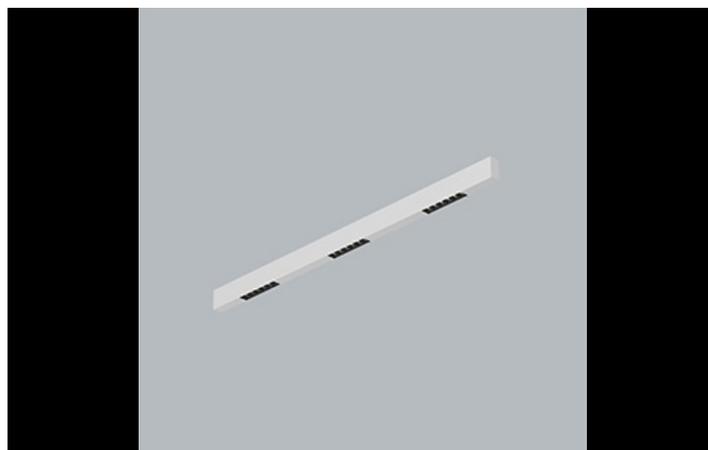

Linear luminaire with minimized width. Made of 34 mm wide and 68 mm high aluminum profile. Mounting directly on the ceiling. The optical system is fulfilled by an anti-glare raster with symmetrical lenses of 45° distribution. Luminaire in single version. Available colours: anodized aluminum, black (RAL 9005), grey (RAL 9006), white (RAL 9016) or any RAL colour on request. End cap aluminum, painted in the colour of the body. Application of luminaires typically for offices, public spaces, community areas in multi-family buildings.



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE SLIGHT SURFACE LOW UGR LED 1200	1181 / 1243,2	8	3000 / 4000	800 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 1800	1771,5 / 1864,5	11,3	3000 / 4000	1200 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 2000	1921,2 / 2022,3	13,2	3000 / 4000	800 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 2400	2362 / 2486	14,5	3000 / 4000	1600 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 3000	2881,5 / 2952,5 / 3033 / 3107,5	19,1 / 18,2	3000 / 4000	1200 x 34 x 68 / 2000 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 4000	3842 / 4044	25,5	3000 / 4000	1600 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 5000	4802,5 / 5055	31,8	3000 / 4000	2000 x 34 x 68

**Technical drawing:**



### Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	145000
<b>Lx/By</b>	L90/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	5 ÷ 35
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

### Mechanical features:

<b>Assembly</b>	surface mounted on ceiling
<b>Material</b>	aluminum
<b>Color</b>	RAL 9005 (black) RAL 9006 (grey) anodised aluminum RAL 9016 (white) *
<b>Diffuser</b>	LOUVER (anti-glare louver)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 07-05-2026