

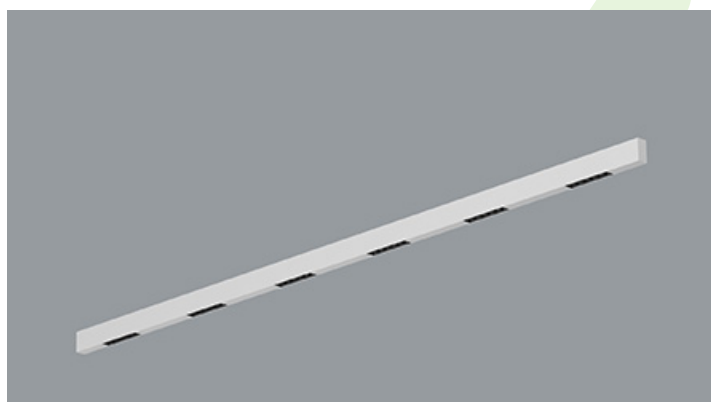


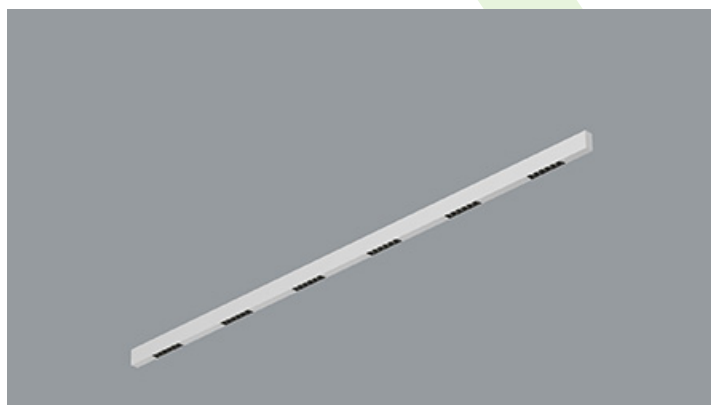

## X-LINE SLIGHT SURFACE LOW UGR LED LINE

Surface mounted luminaires

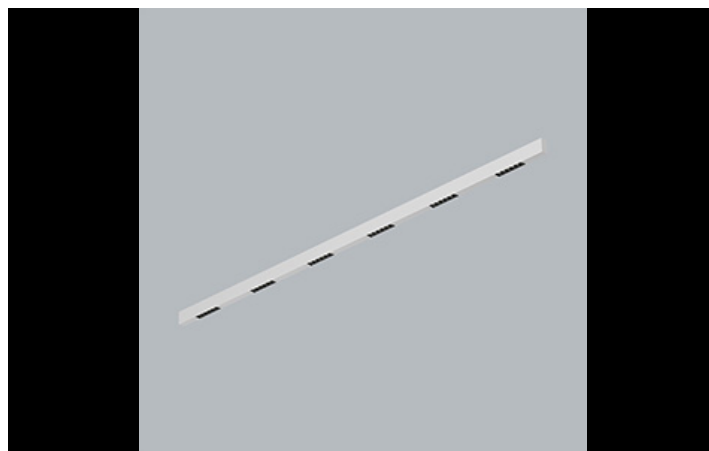

Linear luminaire with minimized width. Made of 34 mm wide and 68 mm high aluminum profile. Mounting directly on the ceiling. The optical system is fulfilled by an anti-glare raster with symmetrical lenses of 45° distribution. Luminaire in system version. Available colours: anodized aluminum, black (RAL 9005), grey (RAL 9006), white (RAL 9016) or any RAL colour on request. End cap aluminum, painted in the colour of the body. Application of luminaires typically for offices, public spaces, community areas in multi-family buildings.



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE SLIGHT SURFACE LOW UGR LED 1200 LINE-BM	1181 / 1243,2	8	3000 / 4000	798 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 1200 LINE-S	1181 / 1243,2	8	3000 / 4000	796 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 1800 LINE-BM	1771,5 / 1864,5	11,3	3000 / 4000	1198 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 1800 LINE-S	1771,5 / 1864,5	11,3	3000 / 4000	1196 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 2000 LINE-BM	1921,2 / 2022,3	13,2	3000 / 4000	798 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 2000 LINE-S	1921,2 / 2022,3	13,2	3000 / 4000	796 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 2400 LINE-BM	2362 / 2486	14,5	3000 / 4000	1598 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 2400 LINE-S	2362 / 2486	14,5	3000 / 4000	1596 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 3000 LINE-BM	2881,5 / 2952,5 / 3033 / 3107,5	19,1 / 18,2	3000 / 4000	1198 x 34 x 68 / 1998 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 3000 LINE-S	2881,5 / 2952,5 / 3033 / 3107,5	19,1 / 18,2	3000 / 4000	1196 x 34 x 68 / 1996 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 4000 LINE-BM	3842 / 4044	25,5	3000 / 4000	1598 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 4000 LINE-S	3842 / 4044	25,5	3000 / 4000	1596 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 5000 LINE-BM	4802,5 / 5055	31,8	3000 / 4000	1998 x 34 x 68
X-LINE SLIGHT SURFACE LOW UGR LED 5000 LINE-S	4802,5 / 5055	31,8	3000 / 4000	1996 x 34 x 68

**Technical drawing:**



### Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	145000
<b>Lx/By</b>	L90/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	5 ÷ 35
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

### Mechanical features:

<b>Assembly</b>	directly mounted to ceiling construction
<b>Material</b>	aluminum
<b>Color</b>	RAL 9005 (black) RAL 9006 (grey) anodised aluminum RAL 9016 (white) *
<b>Diffuser</b>	LOUVER (anti-glare louver)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 31-01-2025