



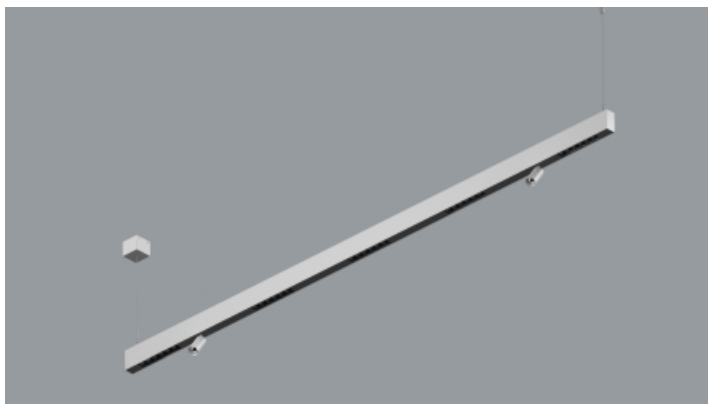

## X-LINE SLIGHT SPOTS LOW UGR L-DOWN LED

Surface mounted luminaires

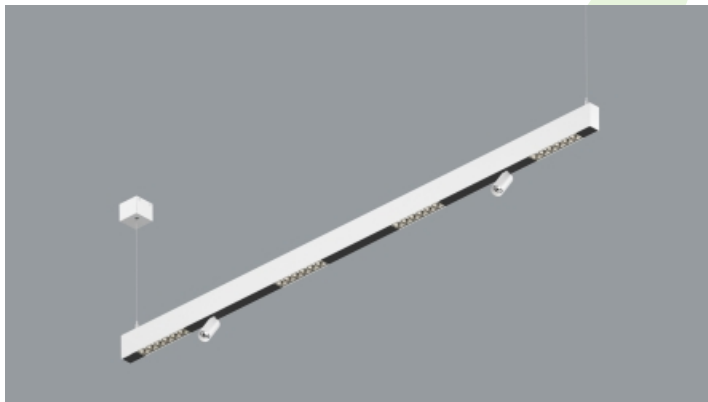

X-LINE SLIGHT SPOTS is a variant of our popular X-Line linear lighting series, now featuring a combination of general and accent lighting. This version integrates compact yet powerful projectors from LUXIONA offer (Luxcan Micro) with a 15° optical beam (PMMA lens), allowing 360° horizontal and 90° vertical rotation, ideal for highlighting any detail in the space. These projectors are also featured in various Luxiona products, achieving a cohesive aesthetic across projects that use multiple products. Luminaires, available in suspended option, come with louver UGR<19 (for different levels of visual comfort and light flow), in 3000K and 4000K colour temperatures, and CRI80. They are available in three finishes (white, black, and silver) and three lengths (1162, 1723, and 2284mm). It is also possible to choose between non-dimmable drivers or DALI dimmable options. In addition to all standard configurations, this product can be customised in LED colour temperature, CRI, and beam angles (24°, 36°, or 50°) to fit specific lighting needs.




## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE SLIGHT SPOTS LOW UGR L-DOWN LED 1800 LOUVER / 2x 600 15°	1772 / 1294 / 1864 / 1334	10,8 / 10,8	3000 / 4000	1200 x 34 x 68
X-LINE SLIGHT SPOTS LOW UGR L-DOWN LED 2400 LOUVER / 2x 600 15°	2362 / 1294 / 2486 / 1334	14,3 / 10,8	3000 / 4000	1600 x 34 x 68
X-LINE SLIGHT SPOTS LOW UGR L-DOWN LED 3000 LOUVER / 2x 600 15°	2881 / 1294 / 2952 / 1294 / 3033 / 1334 / 3108 / 1334	18,8 / 10,8 / 17,9 / 10,8	3000 / 4000	1200 x 34 x 68 / 2000 x 34 x 68
X-LINE SLIGHT SPOTS LOW UGR L-DOWN LED 4000 LOUVER / 2x 600 15°	3842 / 1294 / 4044 / 1334	25,1 / 10,8	3000 / 4000	1600 x 34 x 68
X-LINE SLIGHT SPOTS LOW UGR L-DOWN LED 5000 LOUVER / 2x 600 15°	4803 / 1294 / 5055 / 1334	31,4 / 10,8	3000 / 4000	2000 x 34 x 68

## Technical drawing:

□ ± I  
B  
H



## Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	5 ÷ 35
<b>Driver</b>	standard on/off (E) / standard on/off (E) DIM DALI (EDD) / DIM DALI (EDD) *

\* Variant to specify when ordering

## Mechanical features:

<b>Assembly</b>	surface mounted on slings
<b>Material</b>	aluminum
<b>Color</b>	RAL 9005 (black) anodised aluminum RAL 9016 (white) *
<b>Diffuser</b>	LOUVER (anti-glare louver) / optical system based on PMMA lenses



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-04-2026