




## X-LINE SLIGHT UP&DOWN LED LINE

Surface mounted luminaires

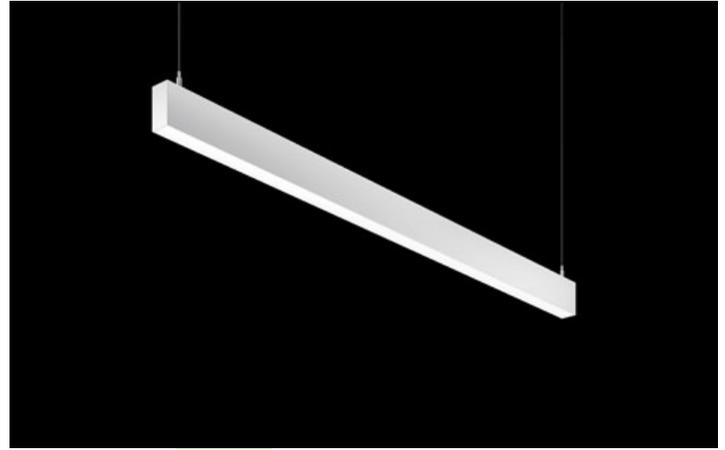

Linear luminaire with minimized width. Made of aluminum profile 34 mm wide and 68 mm high. Mounted on slings. Direct-indirect light distribution. The optical system is fulfilled by an aperture recessed into the body, facing the end cap. Available opal smooth or microprismatic diffuser made of PMMA. Diffuser used for indirect distribution (on top of the luminaire) available only in PLX-T version (transparent PMMA). Luminaire in system version. Available colours: anodized aluminum, black (RAL 9005), grey (RAL 9006), white (RAL 9016) or any RAL colour on request. End cap aluminum, painted in the colour of the body. Use of luminaires typically for offices, public spaces, community areas in multi-family buildings.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE SLIGHT UP&DOWN LED 1100/2200 LINE-BM	3340,1 / 3594,2	19,4	3000 / 4000	570 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 1100/2200 LINE-S	3340,1 / 3594,2	19,4	3000 / 4000	568 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 1950/2600 LINE-BM	4908,9 / 5284	27,3	3000 / 4000	1132 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 1950/2600 LINE-S	4908,9 / 5284	27,3	3000 / 4000	1130 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 3250/3900 LINE-BM	7713,7 / 8303,9	42,8	3000 / 4000	1691 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 3250/3900 LINE-S	7713,7 / 8303,9	42,8	3000 / 4000	1689 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 3300/4400 LINE-BM	7792,2 / 8387,5	45,3	3000 / 4000	1132 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 3300/4400 LINE-S	7792,2 / 8387,5	45,3	3000 / 4000	1130 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 4550/5200 LINE-BM	10518,5 / 11323,6	58,4	3000 / 4000	2254 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 4550/5200 LINE-S	10518,5 / 11323,6	58,4	3000 / 4000	2252 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 5500/6600 LINE-BM	12244,1 / 13180,8	71,3	3000 / 4000	1691 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 5500/6600 LINE-S	12244,1 / 13180,8	71,3	3000 / 4000	1689 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 650/1300 LINE-BM	2104,2 / 2264,3	12,1	3000 / 4000	570 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 650/1300 LINE-S	2104,2 / 2264,3	11,7 / 12,1	3000 / 4000	568 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 7700/8800 LINE-BM	16696,1 / 17974,1	97,2	3000 / 4000	2254 x 34 x 68
X-LINE SLIGHT UP&DOWN LED 7700/8800 LINE-S	16696,1 / 17974,1	97,2	3000 / 4000	2252 x 34 x 68

## Technical drawing:



## Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	80000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	5 ÷ 35
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

## Mechanical features:

<b>Assembly</b>	surface mounted on slings
<b>Material</b>	aluminum
<b>Color</b>	RAL 9005 (black) RAL 9006 (grey) anodised aluminum RAL 9016 (white) *
<b>Diffuser</b>	PLX-T/Micro-PRM (transparent PMMA/micro-prismatic diffuser PMMA) [up/down] PLX-T/PLX (transparent PMMA/PMMA opal) [up/down]



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 07-05-2026