



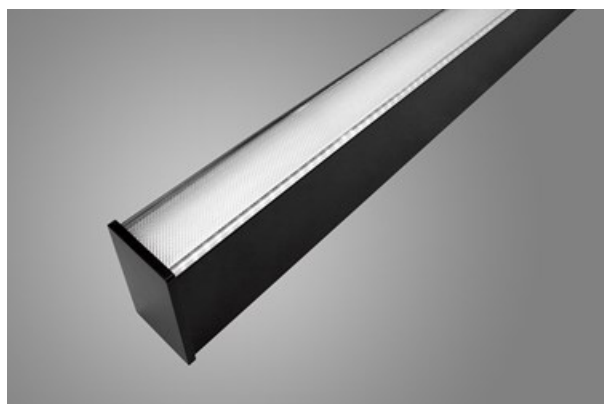

X-LINE SLIM LED LINE

Surface mounted luminaires

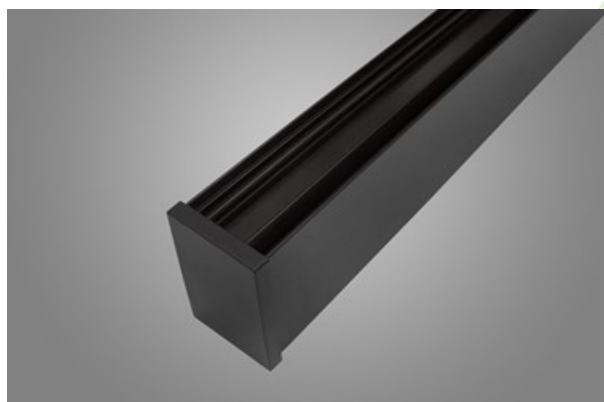


Luminaire for building long light lines made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on suspension. Power supply connection only via EL-marked luminaire. *Selected luminaire variants are available with ENEC certificate.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|-----------------------------------|------------------------|------------------------|-------------|---------------------------------|
| X-LINE SLIM L-DOWN LED 2200 LINE | 2221 / 2338 | 12,8 | 3000 / 4000 | 572 x 48 x 70 / 564 x 48 x 70 |
| X-LINE SLIM L-DOWN LED 4400 LINE | 4442 / 4676 | 24,8 | 3000 / 4000 | 1132 x 48 x 70 / 1124 x 48 x 70 |
| X-LINE SLIM L-DOWN LED 6600 LINE | 6663 / 7014 | 37,2 | 3000 / 4000 | 1692 x 48 x 70 / 1684 x 48 x 70 |
| X-LINE SLIM L-DOWN LED 8800 LINE | 8884 / 9352 | 49,5 | 3000 / 4000 | 2252 x 48 x 70 / 2244 x 48 x 70 |
| X-LINE SLIM L-DOWN LED 13200 LINE | 13326 / 14028 | 74,3 | 3000 / 4000 | 3370 x 48 x 70 |

Technical drawing:

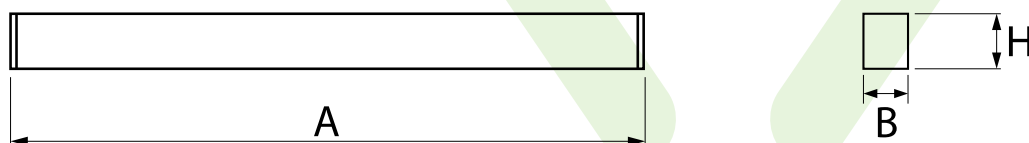

Light and electrical features:

| | |
|---|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 35 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|--|
| Assembly | surface mounted on slings |
| Material | aluminum |
| Color | RAL 9005 (black) RAL 9006 (grey) anodised aluminum RAL 9016 (white) * |
| Diffuser | PLX (PMMA opal) Micro-PRM (micro-prismatic diffuser PMMA) |

Additional information:

Geometric lines of rectangular type must be consulted with luminaire's constructor. The luminaire can be made in CLO version. *Selected luminary variants are available with ENEC certificate.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 17-04-2026