



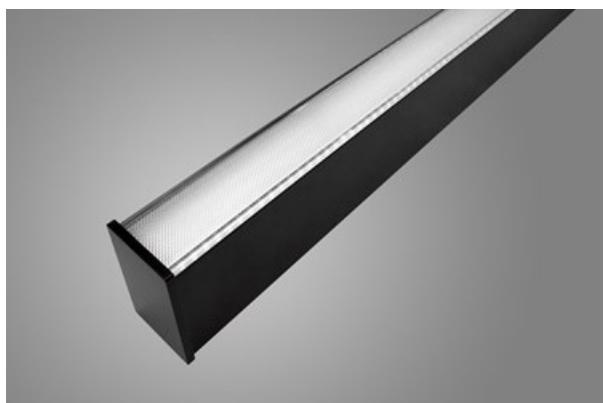

X-LINE SLIM LED LINE

Surface mounted luminaires

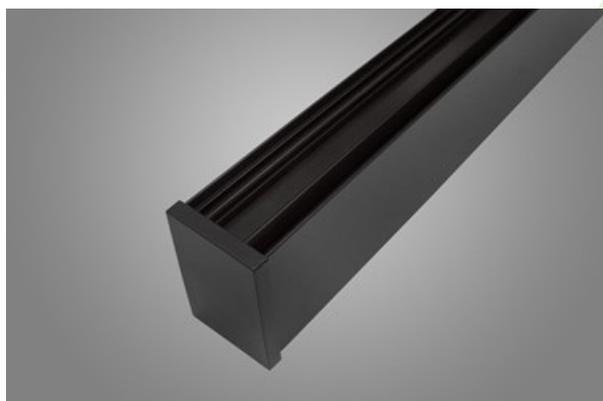

Luminaire for building long light lines made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on suspension. Power supply connection only via EL-marked luminaire. *Selected luminaire variants are available with ENEC certificate.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE SLIM L-DOWN LED 2200 LINE	2221 / 2338	12,8	3000 / 4000	572 x 48 x 70 / 564 x 48 x 70
X-LINE SLIM L-DOWN LED 4400 LINE	4442 / 4676	24,8	3000 / 4000	1132 x 48 x 70 / 1124 x 48 x 70
X-LINE SLIM L-DOWN LED 6600 LINE	6663 / 7014	37,2	3000 / 4000	1692 x 48 x 70 / 1684 x 48 x 70
X-LINE SLIM L-DOWN LED 8800 LINE	8884 / 9352	49,5	3000 / 4000	2252 x 48 x 70 / 2244 x 48 x 70
X-LINE SLIM L-DOWN LED 13200 LINE	13326 / 14028	74,3	3000 / 4000	3370 x 48 x 70

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 35
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9005 (black) RAL 9006 (grey) anodised aluminum RAL 9016 (white) *
Diffuser	PLX (PMMA opal) Micro-PRM (micro-prismatic diffuser PMMA)

Additional information:

Geometric lines of rectangular type must be consulted with luminaire's constructor. The luminaire can be made in CLO version. *Selected luminary variants are available with ENEC certificate.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 07-05-2026