




X-LINE SLIM RECESSED LED LINE

Recessed luminaires

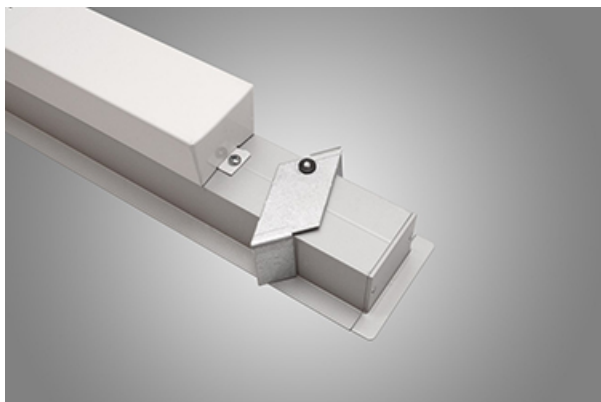


Luminaire made of aluminium profile. Compared to traditional X-Line G/K LED, the size has been reduced and the structure enclosed in a narrower profile, which allows a more elegant aspect of the product. X-Line Slim Recessed uses an opaline Micro PRM diffuser. All this makes it possible to adjust light and create lighting systems, easing the creation of a comfortable view of indoor spaces and their aesthetics. X-Line Slim Recessed is designed for built-in installation on ceilings. The luminaires are adjusted to be linked together with specially designed connectors, which provide great freedom in arranging elements of the system as well as great functionality.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|--|-------------------------|------------------------|-------------|---------------------------------|
| X-LINE SLIM RECESSED LED LINE 4400 | 4442 / 4676 | 24,8 | 3000 / 4000 | 1148 x 70 x 75 / 1136 x 70 x 75 |
| X-LINE SLIM RECESSED LED LINE 4400 TUNABLE WHITE | 4304÷4574 (2700÷6500 K) | 32 | 2700 ÷ 6500 | 1148 x 70 x 75 / 1136 x 70 x 75 |

Technical drawing:



Light and electrical features:

| | |
|---|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000/50000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 35 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|--|
| Assembly | mounted in plasterboard ceilings |
| Material | aluminum |
| Color | RAL 9005 (black) RAL 9006 (grey) anodised aluminum RAL 9016 (white) * |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA) |

Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 24-03-2025