




## X-LINE SLIM RECESSED LOW UGR LED TUNABLE WHITE

Tunable White luminaires

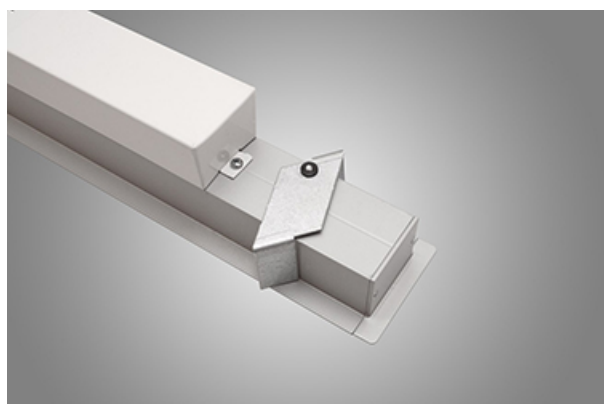


Luminaire made of aluminium profile. Compared to traditional X-Line G/K LED, the size has been reduced and the structure enclosed in a narrower profile, which allows a more elegant aspect of the product. X-Line Slim Recessed uses an anti-glare louvre. All this makes it possible to adjust light and create lighting systems, easing the creation of a comfortable view of indoor spaces and their aesthetics. X-Line Slim Recessed is designed for built-in installation on ceilings. The luminaire is equipped with LED modules adjusted to regulate the color temperature of light in the range from 2700 K to 6500 K.



## Main parameters:

| Name  | Luminous flux LED [lm]  | Power of luminaire [W] | Color [K]   | Dimensions A x B x H [mm] |
|---|-------------------------|------------------------|-------------|---------------------------|
| X-LINE SLIM RECESSED LOW UGR LED 4200 TUNABLE WHITE | 3990÷4305 (2700÷6500 K) | 25,6                   | 2700 ÷ 6500 | 1146 x 70 x 75            |

## Technical drawing:



## Light and electrical features:

|   |                       |
|---|-----------------------|
| Light source                              | LED                   |
| Voltage                                   | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h]               | 50000                 |
| Lx/By                                     | L80/B10               |
| CRI                                       | >80                   |
| SDCM (LED sources)                        | 3                     |
| Photobiological risk class (IEC/EN 62471) | RG0                   |
| Operating temperature range [°C]          | 5 ÷ 35                |
| Driver                                    | DIM DALI (EDD)        |
| Power factor cos φ                        | >0,95                 |

## Mechanical features:

|          |                                  |
|----------|----------------------------------|
| Assembly | mounted in plasterboard ceilings |
| Material | aluminum                         |
| Color    | RAL 9016 (white)                 |
| Diffuser | RASTER (anti-glare louvre)       |

## Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-12-2024