



X-LINE PRO

Surface mounted luminaires



Light fitting made out of aluminium profile. Simple luminaire construction (no mounting plates or LED plates). LEDs in the standard version are mounted by inserting them into the slot in the middle of the profile. Direct (down) light distribution. Available optical systems: anti-glare louvre (silver, white or black on request). The luminaire is available in a single version. Available colors: anodized aluminum, black RAL 9005, white RAL 9016 or any color from the RAL palette on request. Gray, white or black polycarbonate end caps. Plastic plate (HIPS) masking the electronics compartment (only in luminaires with direct distribution). Possibility to use an aluminum snap-on aluminum cover. The use of luminaires typically for offices.






Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|-----------------|------------------------|------------------------|-------------|---------------------------|
| X-LINE PRO 2000 | 2105,5 / 2216,3 | 13,2 | 3000 / 4000 | 564 x 60 x 70 |
| X-LINE PRO 3000 | 3159 / 3324 | 19,1 | 3000 / 4000 | 844 x 60 x 70 |
| X-LINE PRO 4000 | 4212 / 4432 | 25,5 | 3000 / 4000 | 1124 x 60 x 70 |
| X-LINE PRO 6000 | 6318 / 6648 | 38,2 | 3000 / 4000 | 1684 x 60 x 70 |
| X-LINE PRO 8000 | 8424 / 8864 | 50,9 | 3000 / 4000 | 2244 x 60 x 70 |

Technical drawing:

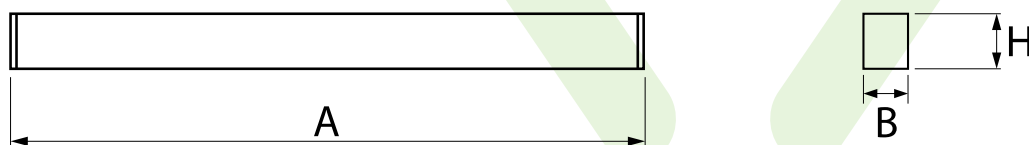

Light and electrical features:

| | |
|--|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 35 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|-----------------|--|
| Assembly | directly mounted to ceiling construction or surface mounted on slings using accessories |
| Material | aluminum |
| Color | RAL 9005 (black) anodised aluminum RAL 9016 (white) * |
| Diffuser | LOUVER (anti-glare louver) |



Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 17-04-2026