



## X-WALL K9 LED COMPACT

### Compact



Surface mounted and wall luminaire. Luminaire body made from aluminum profile, its diffuser made from plastic. Its asymmetric optical system together with the diffuser provides high energetic efficiency. Luminaire recommended for: hospital bathrooms and wards.




National Research Institute, Warsaw



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-WALL K9 LED COMPACT 2000	1994 / 2302	14	3000 / 4000	575 x 50 x 60

Technical drawing:

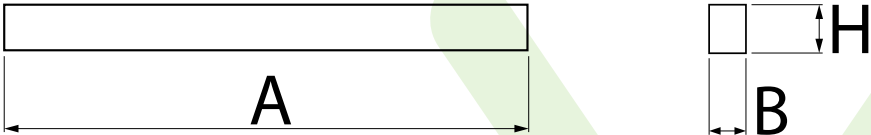

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	anodised aluminum
Diffuser	PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 22-08-2025