



AGAT CLEAN NO FRAME LED CRI95

Clean luminaires CRI95



Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Luminary designed to module and gypsum and cardboard suspended ceilings, equipped with highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Its characteristic feature is lack of aluminum frame what allows to exclude the unwished-for contamination in clean rooms. There are no visible elements joining the diffuser and the luminary body.




Maternity ward, Hospital in Goleniów



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
AGAT CLEAN NO FRAME LED CRI95 3600	3976 / 4142	27,1	3000 / 4000	596 x 296 x 76
AGAT CLEAN NO FRAME LED CRI95 5400	5964,5 / 6213	40,7	3000 / 4000	596 x 596 x 76
AGAT CLEAN NO FRAME LED CRI95 7200	7952,6 / 8284	54,2	3000 / 4000	1196 x 296 x 76 / 596 x 596 x 76
AGAT CLEAN NO FRAME LED CRI95 9000	9940,8 / 10355	67,8	3000 / 4000	596 x 596 x 76
AGAT CLEAN NO FRAME LED CRI95 10800	11928 / 12426	81,3	3000 / 4000	1196 x 596 x 76
AGAT CLEAN NO FRAME LED CRI95 14400	15905,3 / 16568	108,4	3000 / 4000	1196 x 596 x 76

Technical drawing:

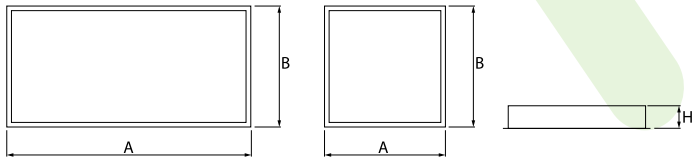

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>95
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	mounted in module ceilings, as well as plasterboard ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-LINE SH (micro-line diffuser PMMA with hardened glass) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) SHM (hardened mat glass)

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 22-08-2025

Dodatkowe informacje / Additional information / Zusätzliche Informationen:

Wszystkie produkty CLEAN przeznaczone do montażu w sufitach podwieszanych są standardowo wyposażone w zaczep do podwieszenia opraw do części sufitu stałego (odciążenie konstrukcji sufitu).

All CLEAN products dedicated for installation in suspended ceilings are equipped with a hook as a standard solution for suspending the luminaires to a part of the fixed ceiling (relieving the suspended ceiling structure).

Alle CLEAN-Produkte geeignet für den Einbau in abgehängten Decken sind standardmäßig mit einem Haken zum Aufhängen der Leuchten an einem Teil der festen Decke ausgestattet (Belastung der Deckenkonstruktion wird verringert).

