




AGAT CLEAN-ECO LED CRI95

Clean luminaires CRI95

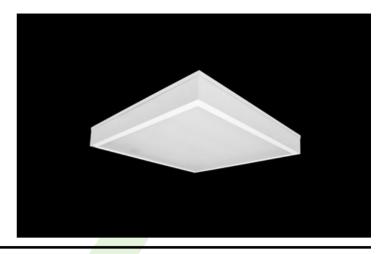

LUXIONA Poland as the only company in Europe has obtained CRI>95 for its luminaries (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering "deep red" color, and R13 responsible for rendering "light orange" color). Luminary designed to module suspended ceilings, equipped with the highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.


















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
AGAT CLEAN-ECO LED CRI95 5400	5875	39,2	4000	592 x 592 x 75
AGAT CLEAN-ECO LED CRI95 7200	7833	51,8	4000	1195 x 300 x 73 / 592 x 592 x 75
AGAT CLEAN-ECO LED CRI95 14400	15666	102,5	4000	1195 x 592 x 73

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>95
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

Mechanical features:

Assembly	mounted in module ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal) SHM (hardened mat glass)

Additional information:

* Variant to specify when ordering

The luminaire can be made in CLO version.