




AGAT LED UGR<19

UGR<19 luminaires








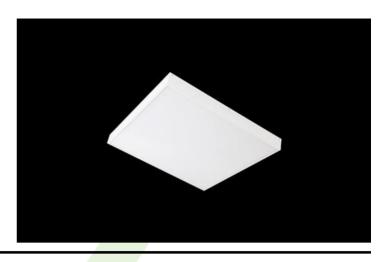

Luminary dedicated for module and suspended ceilings with the T24 grid, equipped with the highly efficient LED sources. Luminary body made from steel sheet, powder coated in white. Monolithic construction is the characteristic feature of the luminary (remaining in one-piece during exploitation process). Luminary available in PLX or Micro-PRM diffuser. Luminary dedicated for the public use structure.

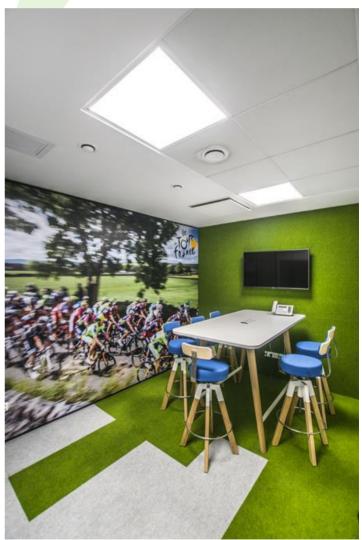

Babyliss PARIS office, Warsaw


















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
AGAT LED 3900	3807 / 4008	20,8	3000 / 4000	596 x 596 x 90
AGAT LED 5200	5076 / 5343	27,8	3000 / 4000	1196 x 296 x 90 / 596 x 596 x 90
AGAT LED 10400	10152 / 10686	55,6	3000 / 4000	1196 x 596 x 90

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

^{*} Variant to specify when ordering

Mechanical features:

Assembly	mounted in module ceilings	
Material	steel sheet	
Color	RAL 9016 (white)	
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)	

Additional information:

The luminaire can be made in CLO version.