




AGAT POS LED UGR<19

UGR<19 luminaires

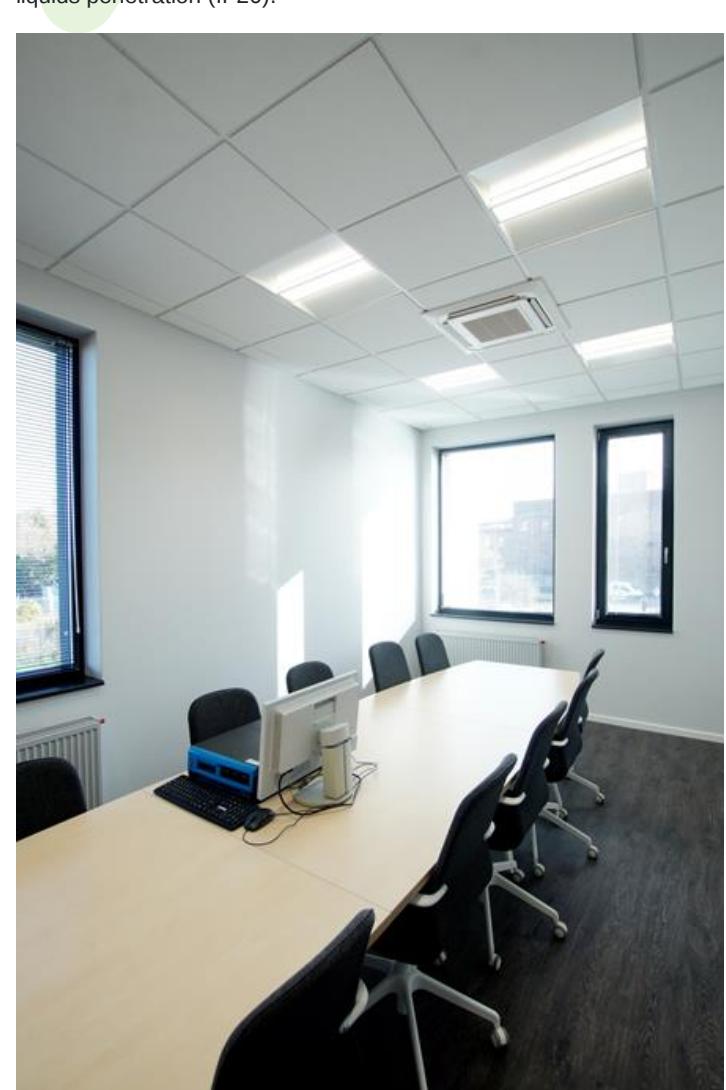


Printing house "Print Group", Szczecin



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|-------------------|------------------------|------------------------|-------------|---------------------------|
| AGAT POS LED 2600 | 2538 / 2672 | 13,9 | 3000 / 4000 | 596 x 596 x 55 |

Technical drawing:

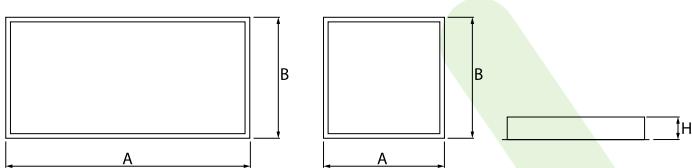

Light and electrical features:

| | |
|-------------------------------------------|-----------------------------------------|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/Bx | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|--------------------------------------------------------------|
| Assembly | mounted in module ceilings, as well as plasterboard ceilings |
| Material | steel sheet |
| Color | RAL 9016 (white) |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA) |

Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).

The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 13-01-2026