




## AGALINE LED 3R

Industrial luminaires

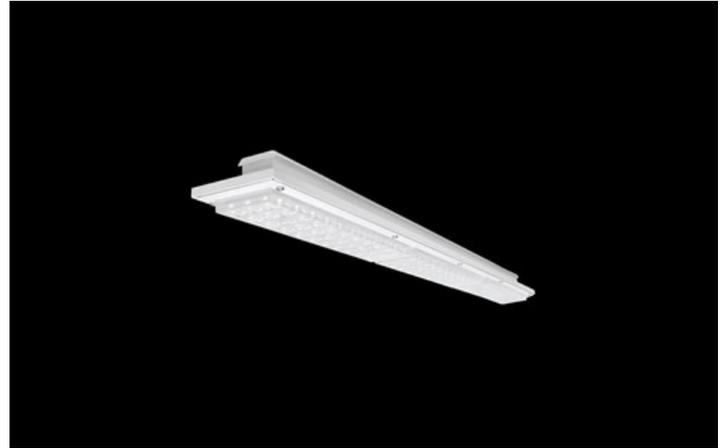

Agaline 3R is a single linear luminaire designed for mounting on slings. The body is made of white powder-coated steel sheet. Optical system based on lenses providing different light distribution. High level of protection against penetration of dust and water - IP65. Agaline is an excellent solution for lighting industrial facilities and warehouses, but also finds application in offices, supermarkets and shops.






**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
AGALINE LED 3R 10800	11442 / 12006	72,6	3000 / 4000 / 5000	940 x 95 x 68
AGALINE LED 3R 14400	15256 / 16008	96,8	3000 / 4000 / 5000	1250 x 95 x 68
AGALINE LED 3R 18000	19070 / 20010	121	3000 / 4000 / 5000	1550 x 95 x 68
AGALINE LED 3R 21600	22884 / 24012	145,2	3000 / 4000 / 5000	1860 x 95 x 68

**Technical drawing:**



**Light and electrical features:**

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	90000
<b>Lx/By</b>	L80B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	-25 ÷ 35
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

**Mechanical features:**

<b>Assembly</b>	surface mounted on slings
<b>Material</b>	steel sheet
<b>Color</b>	RAL 9016 (white)
<b>Diffuser</b>	OPTICS (optical system based on lenses)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-04-2026