




## AMETYST NEW LED COMPACT

### Compact

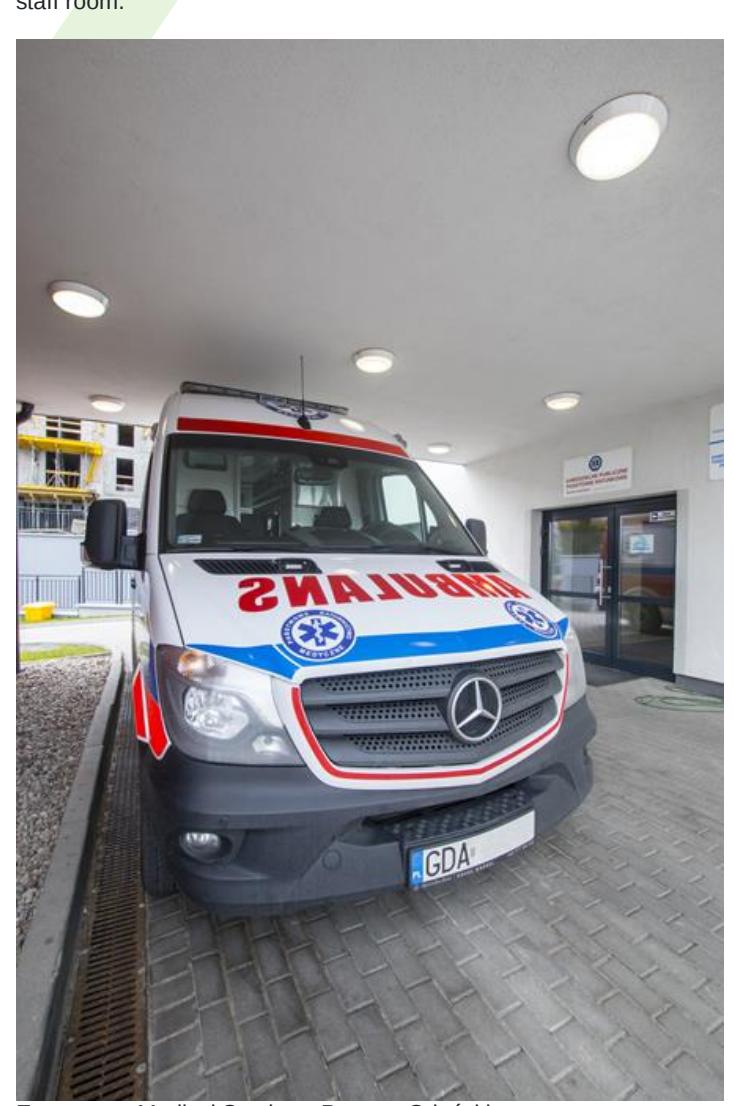


Emergency Medical Services, Pruszcz Gdański



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
AMETYST NEW LED COMPACT 2000	2067 / 2162	12,5	3000 / 4000	Ø356 x 76
AMETYST NEW LED COMPACT 3000	2982 / 3119	18,6	3000 / 4000	Ø356 x 76
AMETYST NEW LED COMPACT 4000	4101 / 4288	24,9	3000 / 4000	Ø356 x 76

## Technical drawing:

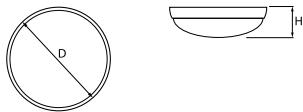

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	80000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	-20 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

## Mechanical features:

Assembly	surface mounted on ceiling or on wall
Material	polycarbonate
Color	RAL 9016 (white)
Diffuser	PC (opalescent polycarbonate)