






ARTSHAPE LINE LED TUNABLE WHITE

Tunable White luminaires








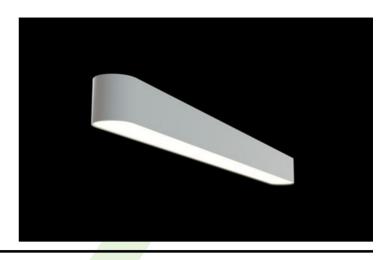

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on slings. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palete, the luminaries allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. LED modules adjusted to regulate the color temperature of light in the range from 2700 K to 6500 K.

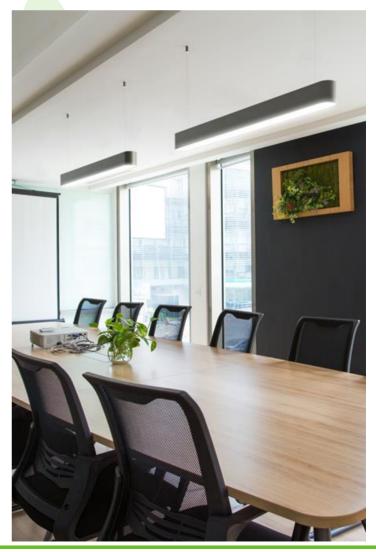


















Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|------------------------------|------------------------|------------------------|-------------|---------------------------|
| ARTSHAPE LINE MEDIUM TW 3000 | 2760 | 27 | 2700 ÷ 6500 | 1100 x 80 x 80 |
| ARTSHAPE LINE LARGE TW 4000 | 4080 | 39 | 2700 ÷ 6500 | 1640 x 80 x 80 |

Technical drawing:



Light and electrical features:

| Light source | LED |
|----------------------------------|-------------------|
| Voltage | 220240 V, 5060 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 4 |
| Operating temperature range [°C] | 0 ÷ 30 |
| Driver | DIM DALI (EDD) |
| Power factor cos φ | >0,95 |

Mechanical features:


| Assembly | surface mounted on slings |
|----------|---------------------------|
| Material | aluminum |
| Color | RAL 9016 (white) |
| Diffuser | PLX (PMMA opal) |

Additional information:

These luminaires are characterised by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation. Temperature range for storage and transport from 0° C to 40° C. The luminaire can be made in CLO version.



Dodatkowe informacje / Additional information / Zusätzliche Informationen:

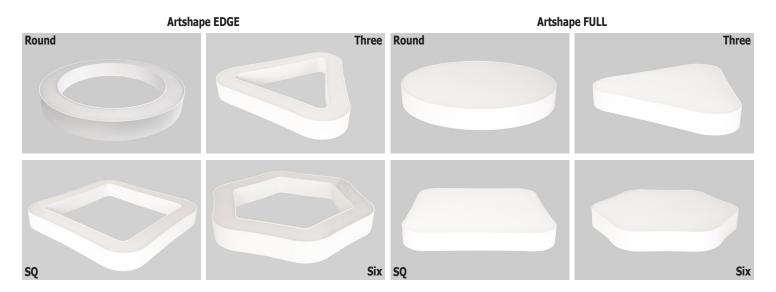

Artshape Up & Down (Round / Three / SQ / Six / Line)








Artshape TW (Tunable white) (Round / Three / Sq / Six / Line)



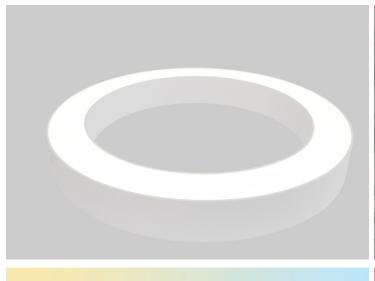



2700 ÷ 6500 K